




# ASI 55

## Hybrid Performance Sealant and Adhesive

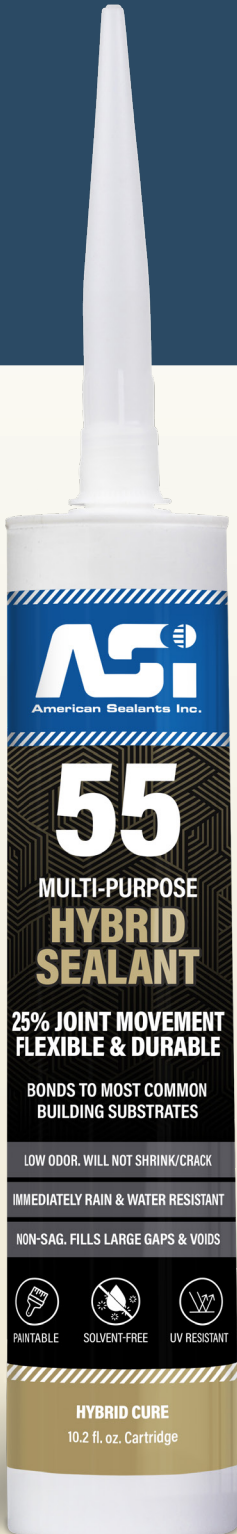

ASI 55 is used for Industrial & Commercial Construction. This one-part, moisture cure, Hybrid Sealant and Adhesive cures to form a permanent, durable, rubber for use in various adhesive and sealant applications. It works well on Galvanized Steel, Stainless Steel, and Aluminum. It has a service temperature of -50° F to 220° F, skin formation time of 30 minutes (at 70° F, 50% RH), and 300% elongation at break.

### Features and Benefits:

- LEED Qualified
- Cures to Wet Substrates Without Negative Effects
- 100% Solids, Will Not Shrink
- Resistant to UV Degradation
- Broad Adhesion Range
- Multi-Purpose Sealant and Adhesive Applications
- Excellent Long-Term Physical Properties
- VOC Compliant, Contains No Solvents or Isocyanates
- Easy to Dispense and Tool at a Variety of Temperatures
- Paintable Within 24 Hours of Application
- Non-Slump, Can Use on Overhead & Vertical Applications
- Low Odor, Eco-Friendly Formulation

### Meets and Exceeds:

- ASTM C920, Class 25, Type S, Grade NS, Uses NT, T, A, M, G & O
- TT-S-00230-C Type II, Class B
- Conforms to California Proposition 65
- Meets USDA Requirements for Non-Food Contact
- Meets Requirements of CARB and SCAQMD
- VOC Compliant (17 g/L ASTM D2369)
- Custom Colors Upon Request (Extra Lead Time)
- Packaging: 10 fl. oz. Tubes, 24 Per Case

**MADE**  
IN ★ THE ★ USA



A Meridian Brand

5655 E. North Belt Road, Las Vegas, NV 89115  
Toll Free 800.641.0808 | Phone 714.432.0600  
Fax 714.432.0660 | [www.designpoly.com](http://www.designpoly.com)