

# ULTRABOND<sup>®</sup>

**HIGH-PERFORMANCE ADHESIVE SOLUTIONS FOR  
VERTICAL CONSTRUCTION AND TRANSPORTATION INFRASTRUCTURE**

TO SCHEDULE A LUNCH & LEARN OR REQUEST  
THAT AN ENGINEER CONTACT YOU DIRECTLY, VISIT  
[ATCEPOXY.COM/CONTACT](https://www.atcepoxy.com/contact)



# ULTRABOND<sup>®</sup>

## ANCHORING & DOWELING ADHESIVES

**HIGH-PERFORMANCE SOLUTIONS FOR VERTICAL CONSTRUCTION AND TRANSPORTATION INFRASTRUCTURE**



CODE COMPLIANT / DOT APPROVED  
WARM & COLD APPLICATIONS  
FAST CURE OR EXTENDED WORKING TIMES



# HANDS DOWN

# THE PROVEN EXPERT IN STRUCTURAL ADHESIVES

**Adhesives Technology Corporation (ATC)** is where science meets compliance. Our world-class chemists and engineers create some of the most innovative structural adhesives in the world. We're not a tool company. We're not a fastener company. All we make are great adhesives — high-performance epoxies, acrylics, ester blends, urethanes, and polyureas — that hold bridges, buildings and roadways together. **ULTRABOND®** products offer a comprehensive selection of anchoring and doweling adhesives for cracked and uncracked concrete at varying strengths, application temperature ranges and curing speeds. Tested in the lab. Proven on the job. Chosen by leading engineers and contractors.



**OVER 250  
STATE APPROVALS  
AND COUNTING**

## IBC AND DOT COMPLIANCE


When quality and safety matter most, it's good to know that **ULTRABOND®** offers a wide array of products, many of which are compliant with the International Building Code (IBC) and broadly approved by state DOTs. With DOT and building code requirements converging in many states, that's an advantage many other manufacturers can't provide.

One click on [atcepoxy.com/dot-approvals](http://atcepoxy.com/dot-approvals) provides approval documents by state or by product.



TESTED IN THE LAB.  
PROVEN ON THE JOB.

## PRO ANCHOR DESIGN SOFTWARE

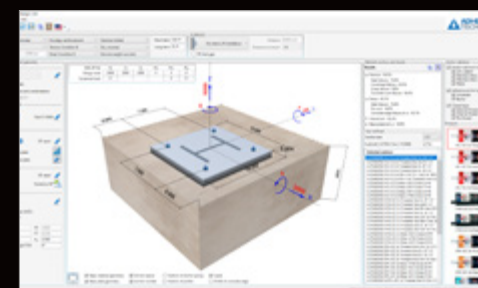

*Pro Anchor Design software is a free, downloadable solution. No need to access the cloud or pay for premium features.*

Free **Pro Anchor Design** software from Adhesives Technology Corp. is an anchor-focused, structural adhesive design solution to aid in meeting the strength design requirements of ACI 318 Chapter 17 (formerly Appendix D). Pro Anchor Design software provides an advanced single panel interface with real-time design utilization percentages

for optimizing loading conditions, embedment depths, anchor sizes, edge and spacing consideration, concrete conditions and reinforcement types.

Speed and accuracy of design, combined with adhesive anchoring solutions from a dedicated specialist like ATC, provides the engineering and construction industry with the highest level of confidence possible.

## TRAINING AND FIELD SUPPORT

ATC engineers and technical sales representatives are always available for jobsite consultation and to conduct Lunch & Learn Seminars. Our NCSEA Diamond Review Approved course on anchor design has been recognized by designers and engineers nationwide and provides continuing education credit where applicable.



We meet the requirements of the National Council of Structural Engineers Association, the Gold Standard for certification of continuing education classes.



# ULTRABOND® HS-1CC

## WORLD'S STRONGEST ANCHORING & DOWELING EPOXY

ULTRABOND® HS-1CC is IBC/IRC code compliant, nationally DOT approved or pending, and the first anchoring system for cracked and uncracked concrete that's available in both cartridge and bulk dispensing options. With the highest short-term elevated temperature resistance of any approved epoxy, ULTRABOND® HS-1CC has a convenient 1:1 mix ratio for easier application. It's also NSF 61 approved and made in the USA.



ULTRABOND® HS-1CC Product Information

Scan QR code for a direct link to a detailed product page containing Tech Data Sheets, Safety Sheets, Certifications, DOT Approvals, tool and accessory listings and more.




### HS-1CC BUYING GUIDE

PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
8.6 FL. OZ.	A9-HS1CC	12 (1,116)
21.2 FL. OZ.	A22-HS1CC	12 (432)
53 FL. OZ.	A53-HS1CC	6 (252)
10 GAL KIT*	B5G-HS1CC-A	1 (12 KITS - 12 A / 12 B)
	B5G-HS1CC-B	

\*Must order 1 each of components A and B

DISPENSING TOOLS & GENERAL ACCESSORIES		
PART NO.	DESCRIPTION	QTY
TM9HD	MANUAL DISPENSING TOOL FOR 9 OR 10 OZ. CARTRIDGES	1
TM22HD	22 OZ. MANUAL DISPENSING TOOL	1
TB22HD-A	22 OZ. BATTERY DISPENSING TOOL	1
TA22HD-A	22 OZ. PNEUMATIC DISPENSING TOOL	1
TB53HD-A	53 OZ. BATTERY DISPENSING TOOL	1
TA53HD-A	53 OZ. PNEUMATIC DISPENSING TOOL	1
T12	10" NOZZLE FOR 9, 22 & 53 OZ. CARTRIDGES	1
T12-3PK	3 PACK T12; 12 EA 3-PACKS PER CASE	36
T34HF	15 3/4" NOZZLE FOR ALL SIZES	1
T34HF-3PK	3 PACK T34HF; 8 EA 3-PACKS PER CASE	24
BR-EXT	BRUSH EXTENSION FOR ALL SIZES	1
BR-SDS	SDS BRUSH ADAPTOR FOR ALL SIZES	1
TUBE916-EXT	NOZZLE EXTENSION TUBING FOR ALL SIZES	1
WEDGE-5PK	RETENTION WEDGE FOR ALL SIZES	5

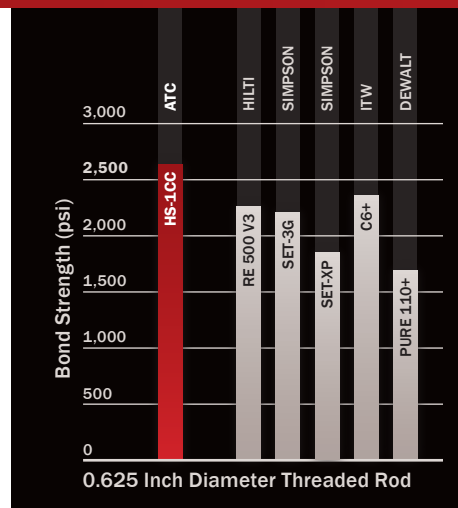

ULTRABOND® HS-1CC outperforms all competitors under a wide range of test conditions. Shown here: bond strength in dry, uncracked concrete, using threaded rod at 160 °F short term with no sustained load.<sup>1</sup>



WIRE BRUSHES*		
PART NO.	DESCRIPTION	QTY
B716	FOR 7/16" DIA DRILL BIT	1
B12	FOR 1/2" DIA DRILL BIT	1
B916	FOR 9/16" DIA DRILL BIT	1
B58	FOR 5/8" DIA DRILL BIT	1
B34	FOR 3/4" DIA DRILL BIT	1
B78	FOR 7/8" DIA DRILL BIT	1
B100	FOR 1" DIA DRILL BIT	1
B118	FOR 1 1/8" DIA DRILL BIT	1
B138	FOR 1 3/8" DIA DRILL BIT	1
B112	FOR 1 1/2" DIA DRILL BIT	1

PISTON PLUGS		
PART NO.	DESCRIPTION	QTY
PP716-5PK	BLACK (7/16"-1/2" DIA DRILL BIT)	5
PP916-5PK	BLUE (9/16" DIA DRILL BIT)	5
PP58-5PK	RED (5/8" DIA DRILL BIT)	5
PP34-5PK	YELLOW (3/4" DIA DRILL BIT)	5
PP78-5PK	GREEN (7/8" DIA DRILL BIT)	5
PP100-5PK	BLACK (1" DIA DRILL BIT)	5
PP118-5PK	ORANGE (1 1/8" DIA DRILL BIT)	5
PP138-5PK	BROWN (1 3/8" DIA DRILL BIT)	5
PP112-5PK	GRAY (1 1/2" DIA DRILL BIT)	5

\*Includes brush handles

# ULTRABOND® HYB-2CC

## THE HYBRID POWERED BY INNOVATION



For cracked and uncracked concrete, new ULTRABOND® HYB-2CC is IBC approved for application in temperatures down to 23 °F. And for jobs where a quick cure rate is required, it will cure completely in 30 minutes at 70°F. Approved for use in dry, damp and water-filled holes, ULTRABOND® HYB-2CC features a higher creep resistance and a longer shelf life. When you need a high strength hybrid anchoring adhesive that's approved for multiple anchor types—including fractional and metric threaded rod & rebar—choose ULTRABOND® HYB-2CC.



ULTRABOND® HYB-2CC Product Information



### HYB-2CC BUYING GUIDE


PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
9.5 FL. OZ.	A10-HYB2CC	12 (900)
13.9 FL. OZ.	A14-HYB2CC	12 (900)
27.9 FL. OZ.	A28-HYB2CC	9 (351)

DISPENSING TOOLS & GENERAL ACCESSORIES		
PART NO.	DESCRIPTION	QTY
TM10-HYB	10 OZ. MANUAL DISPENSING TOOL	1
TM28HD	28 OZ. MANUAL DISPENSING TOOL	1
TB28HD-A	28 OZ. BATTERY DISPENSING TOOL	1
TA28HD-A	28 OZ. PNEUMATIC DISPENSING TOOL	1
TA28-HYB	28 OZ. PNEUMATIC DISPENSING TOOL	1
T16-3PK	9-7/8" NOZZLE FOR ALL SIZES	3
T16EXT-3PK	NOZZLE EXTENSION, 3/8" OD X 8"	12 EA. 3-PACKS (36 EXTENSIONS)
WEDGE-5PK	RETENTION WEDGE FOR ALL SIZES	5


\*Includes brush handles

WIRE BRUSHES*		
PART NO.	DESCRIPTION	QTY
BP716	FOR 7/16" AND 12MM DRILLED HOLES	1
BP12	FOR 1/2" DRILLED HOLES	1
BPM14	FOR 12MM DRILLED HOLES	1
BP916	FOR 9/16" DRILLED HOLES	1
BPM16	FOR 16MM DRILLED HOLES	1
BP58	FOR 5/8" DRILLED HOLES	1
BP1116	FOR 1 1/16" AND 18MM DRILLED HOLES	1
BP34	FOR 3/4" DRILLED HOLES	1
BPM20	FOR 20MM DRILLED HOLES	1
BPM24	FOR 24MM DRILLED HOLES	1
BP78	FOR 7/8" DRILLED HOLES	1
BPM25	FOR 25MM DRILLED HOLES	1
BP100	FOR 1" DRILLED HOLES	1
BPM28	FOR 28MM DRILLED HOLES	1
BP118	FOR 1 1/8" AND 30MM DRILLED HOLES	1
BPM32	FOR 32MM DRILLED HOLES	1
BPM35	FOR 35MM DRILLED HOLES	1
BP138	FOR 1 3/8" DRILLED HOLES	1
BP112	FOR 1 1/2" DRILLED HOLES	1
BPM40	FOR 40MM DRILLED HOLES	1

\*Includes brush handles

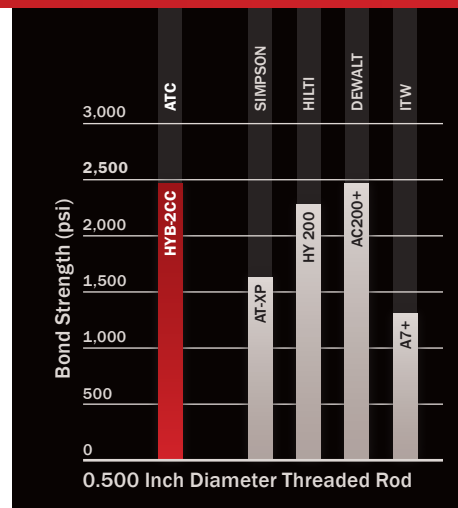

ULTRABOND® HYB-2CC outperforms competitors under a wide range of test conditions. Shown here: bond strength in dry, uncracked concrete, using threaded rod at 176 °F short term with sustained load.<sup>1</sup>



ULTRABOND products are backed by expert jobsite support.





# ULTRABOND® EPX-3CC


HIGH PERFORMANCE. VALUE OPTIMIZED FORMULA.



ULTRABOND® EPX-3CC is everything you need, and nothing you don't, because it's the perfect balance between high performance and high volume. With an installation temperature range of 48 °F to 108 °F, and a full cure in 4 hours at 93 °F, ULTRABOND® EPX-3CC is formulated with a 1:1 mix ratio and a 24-month shelf life to make it easier to use and store.



ULTRABOND® EPX-3CC Product Information

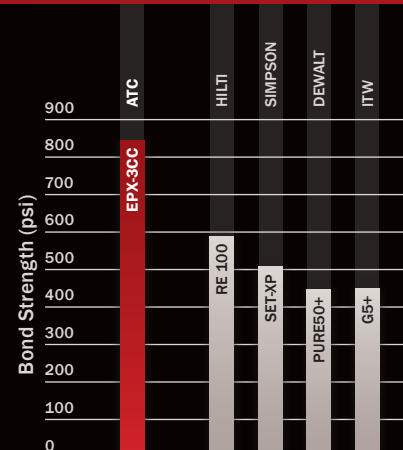

0.500 Inch Diameter Threaded Rod

ULTRABOND® EPX-3CC outperforms all competitors under a wide range of test conditions. Shown here: bond strength in dry, cracked concrete, using threaded rod at 130 °F short term with sustained load. <sup>1</sup>



## EPX-3CC BUYING GUIDE

PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
8.6 FL. OZ.	A9-EPX-3CC	12 (1,116)
21.2 FL. OZ.	A22-EPX-3CC	12 (432)
53 FL. OZ.	A53-EPX-3CC	6 (252)
10 GAL KIT*	B5G-EPX-3CC-A	1 (12 KITS - 12 A/12 B)
	B5G-EPX-3CC-B	

\*Must order 1 each of components A and B

DISPENSING TOOLS & GENERAL ACCESSORIES		
PART NO.	DESCRIPTION	QTY
TM9HD	MANUAL DISPENSING TOOL FOR 9 OR 10 OZ. CARTRIDGES	1
TM22HD	22 OZ. MANUAL DISPENSING TOOL	1
TB22HD-A	22 OZ. BATTERY DISPENSING TOOL	1
TA22HD-A	22 OZ. PNEUMATIC DISPENSING TOOL	1
TB53HD-A	53 OZ. BATTERY DISPENSING TOOL	1
TA53HD-A	53 OZ. PNEUMATIC DISPENSING TOOL	1
T12	10" NOZZLE FOR 9, 22 & 53 OZ. CARTRIDGES	1
T12-3PK	3 PACK T12; 12 EA 3-PACKS PER CASE	36
T34HF	15 3/4" NOZZLE FOR ALL SIZES	1
T34HF-3PK	3 PACK T34HF; 8 EA 3-PACKS PER CASE	24
BR-EXT	BRUSH EXTENSION FOR ALL SIZES	1
BR-SDS	SDS BRUSH ADAPTOR FOR ALL SIZES	1
TUBE916-EXT	NOZZLE EXTENSION TUBING FOR ALL SIZES	1
WEDGE-5PK	RETENTION WEDGE FOR ALL SIZES	5

WIRE BRUSHES*		
PART NO.	DESCRIPTION	QTY
B716	FOR 7/16" DIA DRILL BIT	1
B12	FOR 1/2" DIA DRILL BIT	1
B916	FOR 9/16" DIA DRILL BIT	1
B58	FOR 5/8" DIA DRILL BIT	1
B34	FOR 3/4" DIA DRILL BIT	1
B78	FOR 7/8" DIA DRILL BIT	1
B100	FOR 1" DIA DRILL BIT	1
B118	FOR 1 1/8" DIA DRILL BIT	1
B138	FOR 1 3/8" DIA DRILL BIT	1
B112	FOR 1 1/2" DIA DRILL BIT	1

\*Includes brush handles

PISTON PLUGS		
PART NO.	DESCRIPTION	QTY
PP716-5PK	BLACK (7/16"-1/2" DIA DRILL BIT)	5
PP916-5PK	BLUE (9/16" DIA DRILL BIT)	5
PP58-5PK	RED (5/8" DIA DRILL BIT)	5
PP34-5PK	YELLOW (3/4" DIA DRILL BIT)	5
PP78-5PK	GREEN (7/8" DIA DRILL BIT)	5
PP100-5PK	BLACK (1" DIA DRILL BIT)	5
PP118-5PK	ORANGE (1 1/8" DIA DRILL BIT)	5
PP138-5PK	BROWN (1 3/8" DIA DRILL BIT)	5
PP112-5PK	GRAY (1 1/2" DIA DRILL BIT)	5



OUR STRENGTH LIES IN OUR ADVANCED ENGINEERING.

# ULTRABOND® ACRYL-8CC


FAST CURE. COLDEST INSTALLATION TEMPERATURE.



ULTRABOND ACRYL-8CC® is a two-component (10:1 mix ratio by volume) anchoring system. It resists wind and earthquake loading and sustained loads up to 161 °F.



ULTRABOND® ACRYL-8CC Product Information

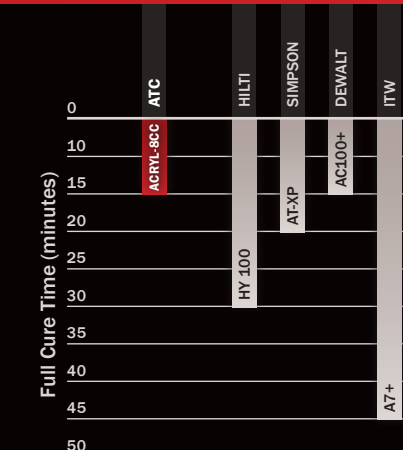

ULTRABOND® ACRYL-8CC provides the fastest full cure of any competitive product at each product's own maximum published installation temperature. <sup>1</sup>



## ACRYL-8CC BUYING GUIDE

PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
9.5 FL. OZ.	A10-ACRYL8CC	12 (900)
27.9 FL. OZ.	A28-ACRYL8CC	8 (240)

DISPENSING TOOLS & GENERAL ACCESSORIES		
PART NO.	DESCRIPTION	QTY
TM9HD	MANUAL DISPENSING TOOL FOR 9 OR 10 OZ. CARTRIDGES	1
TM28HD	28 OZ. MANUAL DISPENSING TOOL	1
TB28HD-A	28 OZ. BATTERY DISPENSING TOOL	1
TA28HD-A	28 OZ. PNEUMATIC DISPENSING TOOL	1
T10-8CC	8 1/2" NOZZLE FOR 10 OZ. CARTRIDGE	1
T28-8CC	9 1/2" NOZZLE FOR 28 OZ. CARTRIDGE	1
BA-EXT	BRUSH EXTENSION FOR ALL SIZES	1
BA-SDS	SDS BRUSH ADAPTOR FOR ALL SIZES	1
T-8CCXTPK	NOZZLE EXTENSION TUBING FOR ALL SIZES	1
WEDGE-5PK	RETENTION WEDGE FOR ALL SIZES	5

PISTON PLUGS		
PART NO.	DESCRIPTION	QTY
PA34-5PK	CLEAR (3/4" DIA DRILL BIT)	5
PA78-5PK	CLEAR (7/8" DIA DRILL BIT)	5
PA100-5PK	CLEAR (1" DIA DRILL BIT)	5
PA118-5PK	CLEAR (1 1/8" DIA DRILL BIT)	5
PA138-5PK	CLEAR (1 3/8" DIA DRILL BIT)	5
PA112-5PK	CLEAR (1 1/2" DIA DRILL BIT)	5

WIRE BRUSHES*		
PART NO.	DESCRIPTION	QTY
BA716	FOR 7/16" DIA DRILL BIT	1
BA916	FOR 9/16" DIA DRILL BIT	1
BA58	FOR 5/8" DIA DRILL BIT	1
BA34	FOR 3/4" DIA DRILL BIT	1
BA78	FOR 7/8" DIA DRILL BIT	1
BA100	FOR 1" DIA DRILL BIT	1
BA118	FOR 1 1/8" DIA DRILL BIT	1
BA138	FOR 1 3/8" DIA DRILL BIT	1
BA112	FOR 1 1/2" DIA DRILL BIT	1

\*Use brushes with SDS adaptor (BA-SDS)



ULTRABOND® gives engineers and contractors the strength to do more.



# ULTRABOND® 1

DOT APPROVED. OVER 20 YEARS OF TRUSTED PERFORMANCE.



Tried and true for more than 20 years, **ULTRABOND® 1** is NTPEP compliant, offering substantial load capacity and a convenient 1:1 mix ratio. Made in the USA, **ULTRABOND® 1** has numerous DOT approvals. Available in a variety of cartridge sizes and bulk containers.



# ULTRABOND® 2

EXTENDED WORKING TIME FOR WARMER WEATHER.



# ULTRABOND® 1300

DOT APPROVED, NON-SAG DOWELING EPOXY.



With extensive DOT approvals, **ULTRABOND® 1300** high-strength doweling epoxy is available in cartridges and also has a non-abrasive consistency ideal for use in bulk dispensing systems without adverse wear on pumps. Its non-sag, high modulus 1:1 mix ratio makes it that much easier to use.




# ULTRABOND® 1300-FG

FAST GEL DOWELING EPOXY.



THE STRENGTH YOU NEED TO MOVE YOUR PROJECT FORWARD

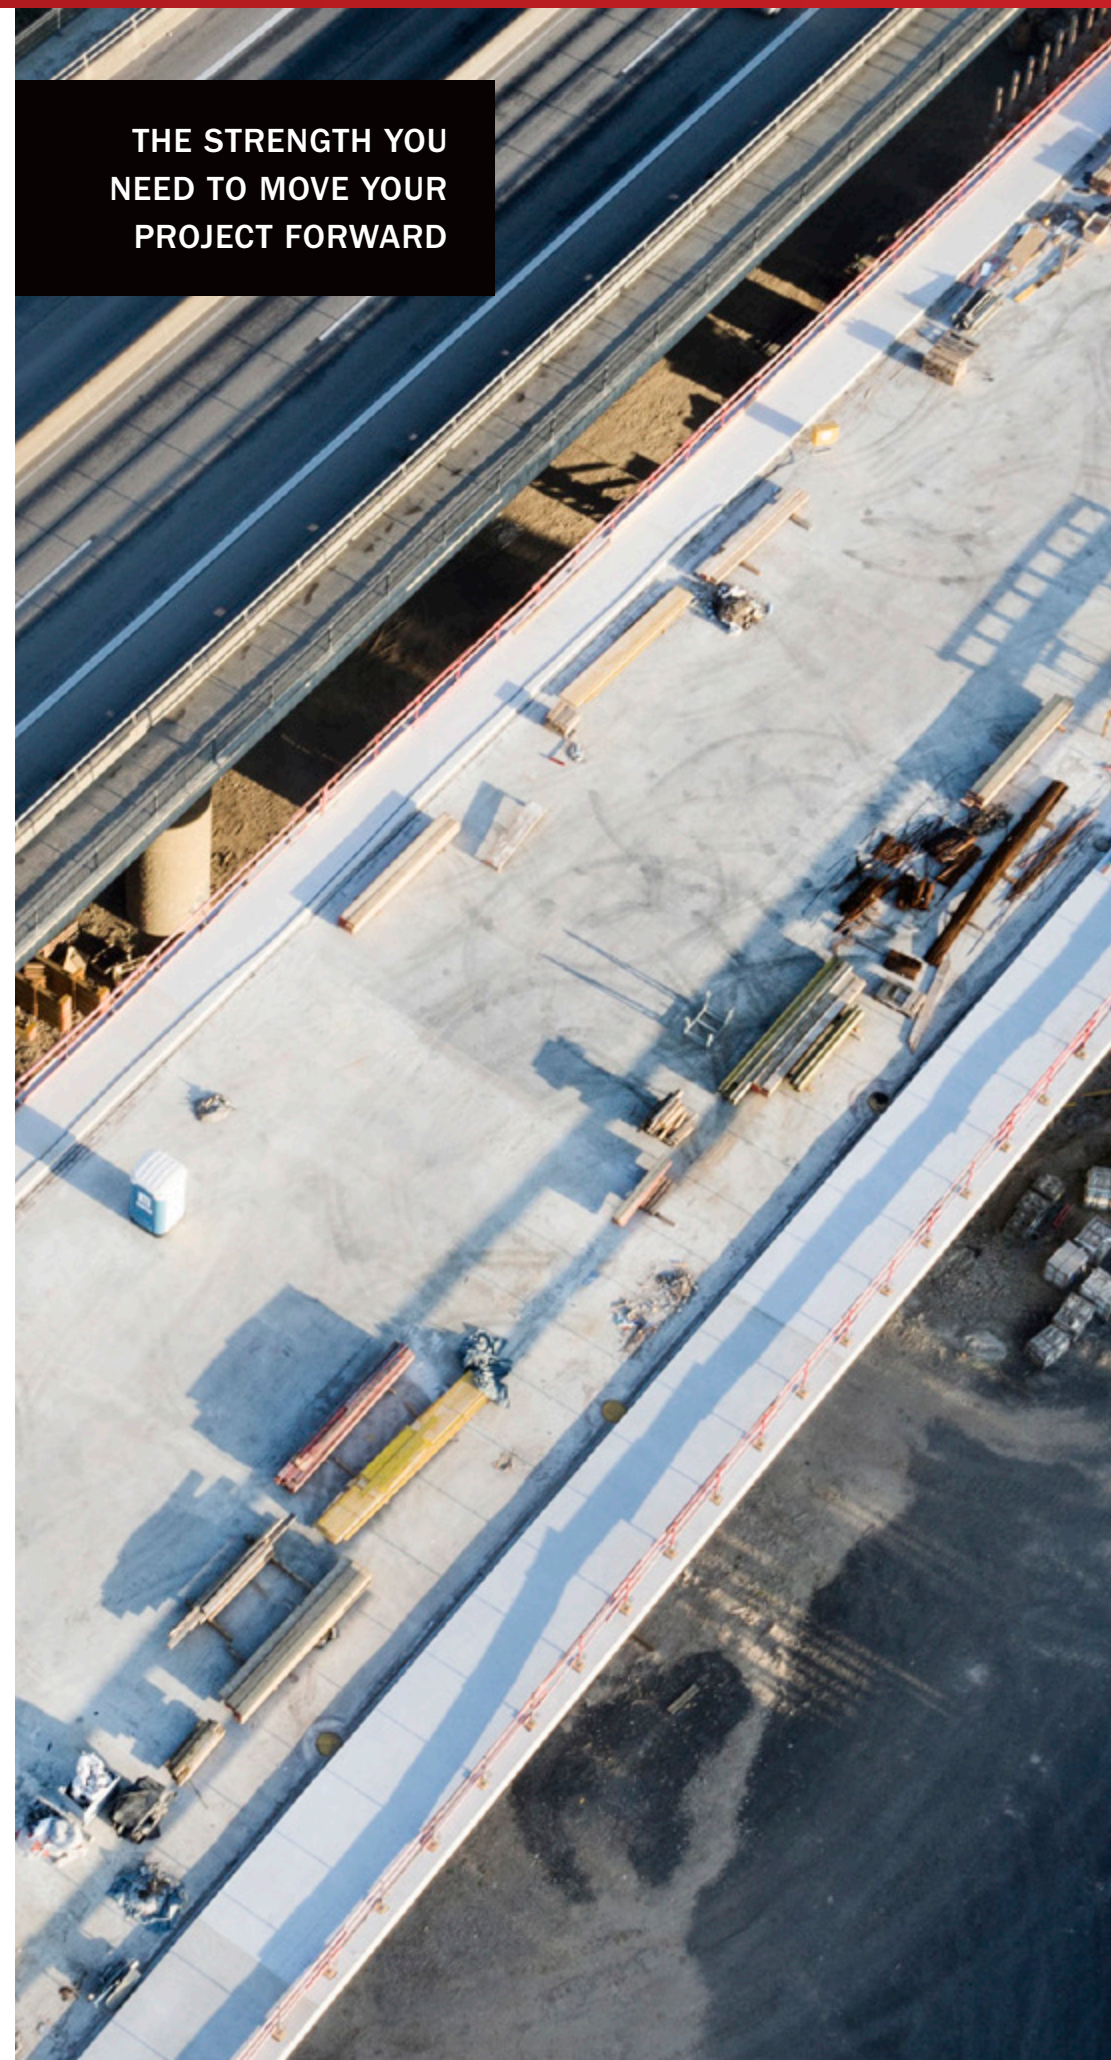

# ULTRABOND® HARD-ROK

HIGH-STRENGTH, FAST-SETTING CEMENTITIOUS ANCHORING GROUT



Whether you're anchoring threaded rod and rebar, railings, sign posts or parking meters, **ULTRABOND® HARD-ROK** is a rapid setting, high-strength, non-shrink and non-metallic anchoring cement suitable for interior or exterior applications. Mix with water to either a pourable or putty-like consistency. Perfect for patching holes and cracks in roads and sidewalks, too!



PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
5 GALLON (50 LBS)	HR-AC	1 (42)





# ULTRABOND® ASF-1000

## FAST-CURING, COLD WEATHER DOWELING ADHESIVE



With an ultra-fast, 30-minute full cure time in dry concrete, **ULTRABOND® ASF-1000** offers speedy mortar repair for panels and other concrete surfaces. As a high bond strength, styrene free, acrylic system with non-sag consistency, **ULTRABOND® ASF-1000** boasts numerous DOT approvals.



ULTRABOND®  
ASF-1000  
Product  
Information

# ULTRABOND® ASF-2000

## FAST-CURING, COLD WEATHER DOWELING ADHESIVE



**ULTRABOND® ASF-2000** is a domestically manufactured, two-component styrene free, acrylic adhesive used for anchoring and doweling applications in uncracked concrete with threaded rod and rebar. It is suitable for use in temperatures between 5 °F and 110 °F (-15 °C to 43 °C). Available in a 28 oz. cartridge.



ULTRABOND®  
ASF-2000  
Product  
Information

### ASF-1000 & ASF-2000 BUYING GUIDE

ASF-1000 PACKAGING		
SIZE	PART NO.	CASE QTY (PALLET QTY)
10 FL. OZ.	A10-ASF1000	12 (900)
10 FL. OZ.	A10-ASF1000CD	24 (576)
28 FL. OZ.	A28-ASF1000	8 (384)

DISPENSING TOOLS & GENERAL ACCESSORIES		
PART NO.	DESCRIPTION	QTY
TM9HD	MANUAL DISPENSING TOOL FOR 9 OR 10 OZ. CARTRIDGES	1
TM28HD	28 OZ. MANUAL DISPENSING TOOL	1
TB28HD-A	28 OZ. BATTERY DISPENSING TOOL	1
TA28HD-A	28 OZ. PNEUMATIC DISPENSING TOOL	1
T14	NOZZLE FOR 10 & 28 OZ. CARTRIDGES	1
T14-3PK	NOZZLE FOR 10 & 28 OZ. CARTRIDGES	36
BR-EXT	BRUSH EXTENSION FOR ALL SIZES	1
BR-SDS	SDS BRUSH ADAPTOR FOR ALL SIZES	1
TUBE916-EXT	NOZZLE EXTENSION TUBING FOR ALL SIZES	1

WIRE BRUSHES*		
PART NO.	DESCRIPTION	QTY
B716	FOR 7/16" DIA DRILL BIT	1
B916	FOR 9/16" DIA DRILL BIT	1
B34	FOR 3/4" DIA DRILL BIT	1
B78	FOR 7/8" DIA DRILL BIT	1
B100	FOR 1" DIA DRILL BIT	1
B118	FOR 1 1/8" DIA DRILL BIT	1

\* Includes brush handles

ASF-2000 PACKAGING		
SIZE	PART NO.	CASE QTY (PALLET QTY)
28 FL. OZ.	A28-ASF2000	8 (384)



WHEN THE SPECS COME ON STRONG, ULTRABOND® COMES ON STRONGER.



### ULTRABOND® 1 BUYING GUIDE

PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
8.6 FL. OZ.	A9-112PK	12 (1,116)
21.2 FL. OZ.	A22-1N	12 (432)
53 FL. OZ.	A53-1N	6 (252)
10 GAL KIT*	B5G-1S-A B5G-1S-B	1 (12 KITS - 12 A/12 B)
100 GAL KIT*	B50G-1S-A B50G-1S-B	1 (2 KITS - 2 A/2 B)

\* Must order one each of components A and B

### ULTRABOND® 2 BUYING GUIDE

PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
21.2 FL. OZ.	A22-2N	12 (432)

### ULTRABOND® 1300 BUYING GUIDE

PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
8.6 FL. OZ.	A9-1300HN	12 (1,116)
21.2 FL. OZ.	A22-1300N	12 (432)
53 FL. OZ.	A53-1300N	6 (252)
102 FL. OZ.	BUG-1300	1 (75)
2 GAL KIT	B2G-1300	1 (75)
10 GAL KIT*	B5G-1300S-A B5G-1300S-B	1 (12 KITS - 12 A / 12 B)
100 GAL KIT*	B50G-1300S-A B50G-1300S-B	1 (2 KITS - 2 A / 2 B)

\* Must order one each of components A and B

### ULTRABOND® 1300-FG BUYING GUIDE

PACKAGING		
SIZE	PART NO.	QTY (PALLET QTY)
21.2 FL. OZ.	A22-1300FGN	12 (432)
53 FL. OZ.	A53-1300FGN	6 (252)

### ULTRABOND® 1, 2, 1300 & 1300-FG

DISPENSING TOOLS & GENERAL ACCESSORIES		
PART NO.	DESCRIPTION	QTY
TM9HD	MANUAL DISPENSING TOOL FOR 9 OR 10 OZ. CARTRIDGES	1
TM22HD	22 OZ. MANUAL DISPENSING TOOL	1
TB22HD-A	22 OZ. BATTERY DISPENSING TOOL	1
TA22HD-A	22 OZ. PNEUMATIC DISPENSING TOOL	1
TB53HD-A	53 OZ. BATTERY DISPENSING TOOL	1
TA53HD-A	53 OZ. PNEUMATIC DISPENSING TOOL	1
T12	10" NOZZLE FOR 9, 22 & 53 OZ. CARTRIDGES	1
T12-3PK	3 PACK T12; 12 EA 3-PACKS PER CASE	36
T34HF	15 3/4" NOZZLE FOR ALL SIZES	1
T34HF-3PK	3 PACK T34HF; 8 EA 3-PACKS PER CASE	24
BR-EXT	BRUSH EXTENSION FOR ALL SIZES	1
BR-SDS	SDS BRUSH ADAPTOR FOR ALL SIZES	1
TUBE916-EXT	NOZZLE EXTENSION TUBING FOR ALL SIZES	1
WEDGE-5PK	RETENTION WEDGE FOR ALL SIZES	5

WIRE BRUSHES*		
PART NO.	DESCRIPTION	QTY
B716	FOR 7/16" DIA DRILL BIT	1
B916	FOR 9/16" DIA DRILL BIT	1
B58	FOR 5/8" DIA DRILL BIT	1
B34	FOR 3/4" DIA DRILL BIT	1
B78	FOR 7/8" DIA DRILL BIT	1
B100	FOR 1" DIA DRILL BIT	1
B118	FOR 1 1/8" DIA DRILL BIT	1
B112	FOR 1 1/2" DIA DRILL BIT	1

\* Includes brush handles

<sup>1</sup> Hilti is a registered trademark of Hilti Aktiengesellschaft Corporation. Simpson, SET-XP and SET-3G are registered trademarks of Simpson Strong-Tie Company, Inc. ITW Redhead is a registered trademark of Illinois Tool Works, Inc. DeWalt, Pure50+ and Pure110+ are registered trademarks, and AC200+ is a trademark of Stanley Black & Decker.