



# PRODUCT CATALOG

---

Flooring Adhesives Since 1977





TAYLOR  
04 TIMELINE

RESILIENT COLLECTIONS

06	INTRODUCTION	12	2037
08	RESOLUTE®	12	501
09	PINNACLE®	14	APPROVED FLOORING TYPES
10	DYNAMIC®	16	COLLECTION AT A GLANCE
11	STEADFAST®	17	APPROVED INSTALLATION TOOLS
12	2062		

WOOD COLLECTIONS

18	INTRODUCTION	25	TIMBERLINE™
20	RIDGELINE®	26	2049
21	IRONWOOD®	26	REPAIR™
22	ASPEN®	28	APPROVED FLOORING TYPES
23	IRONWOOD® GLUE ASSIST	30	COLLECTION AT A GLANCE
24	ALPINE™	31	APPROVED INSTALLATION TOOLS

CARPET COLLECTIONS

32	INTRODUCTION	37	775/775-C
34	AGILE®	37	2055
35	VERSATILE®	37	2070
36	900	37	2089
36	722	37	757
36	710	38	APPROVED FLOORING TYPES
36	EDGE-LOCK	40	COLLECTION AT A GLANCE
37	720/720-C	42	APPROVED INSTALLATION TOOLS

MOISTURE + SPECIALTY COLLECTIONS

44	INTRODUCTION	52	TERRAIN™
46	SAHARA®	52	901
47	ZEPHYR®	52	1N/1N-C
48	ENHANCE®	53	2025
49	FINALE®	53	725
50	ELEVATE®	54	COLLECTION AT A GLANCE
51	GRAVITY®	56	APPROVED INSTALLATION TOOLS

TAYLOR

58	TECHNICAL DEPARTMENT	62	ASSOCIATIONS + GROUPS
60	SUSTAINABILITY	64	PACKAGING & SHIPPING

Welcome to **TAYLOR ADHESIVES**, the flooring industry’s premier adhesive specialist. With a legacy of success since 1977, we are now supported by a world-wide and diverse adhesives leader: **Meridian**.

**TAYLOR** produces a complete collection of adhesives, primers, and coatings for resilient, wood, and carpet flooring installations as well as moisture protection products. We proudly back the performance of our products with the strongest warranties in the industry.





Wally Taylor started W.F. Taylor as a carpet adhesive supplier



Launched MS Plus with Meta-Tec for safer and easier wood installations – solvent and isocyanate free

Relocated our headquarters to Dalton, GA



Opened our TAYLOR Technology & Training Center (T3C) in Dalton, GA to support customers and installers

TAYLOR joined Meridian Adhesives Group as the flagship brand of the Flooring Division



Launched TAYLOR TIME, our branded training and education platform  
+ Became the premier adhesive supplier of CFI



Frontier joined TAYLOR's product line



1977

2006

2016

2017

2018

2020

2021

# TAYLOR *timeline*

2001

2008

2016

2017

2019

2021

2022

Introduced Meta-Tec technology with a superior cross-linking system, achieving high-shear strength and a waterproof bond



Introduced MS Plus Advance, the most innovative wood flooring adhesive with moisture and sound control



Introduced Sahara®, our first unlimited moisture mitigation coating for concrete



Launched our Signature Line® product collection



Polycom joined TAYLOR as part of the Flooring Division

Introduced our Essentials Line, and color-coded labels with Spanish and French translations



Introduced Gravity®, the industry's first anti-skid coating for loose lay installations  
+ Introduced Elevate®, our first wall adhesive



# THE RESILIENT COLLECTION

## Signature Line®

- **RESOLUTE®**  
INDOOR/OUTDOOR UNLIMITED MOISTURE PROTECTION AND  
SOUND CONTROL ADHESIVE
- **PINNACLE®**  
HARD-SET, HIGH-MOISTURE TOLERANT ADHESIVE
- **DYNAMIC®**  
FIRM-SET, HIGH-MOISTURE TOLERANT ADHESIVE
- **STEADFAST®**  
CLEAR THIN SPREAD VCT ADHESIVE

## Essentials Line

- **2062**  
FIBERGLASS SHEET SEAM SEALER

## Additional Products

- **2037**  
FIBERGLASS SHEET PSA
- **501**  
SOLVENT-FREE EPOXY





## Resilient Collection

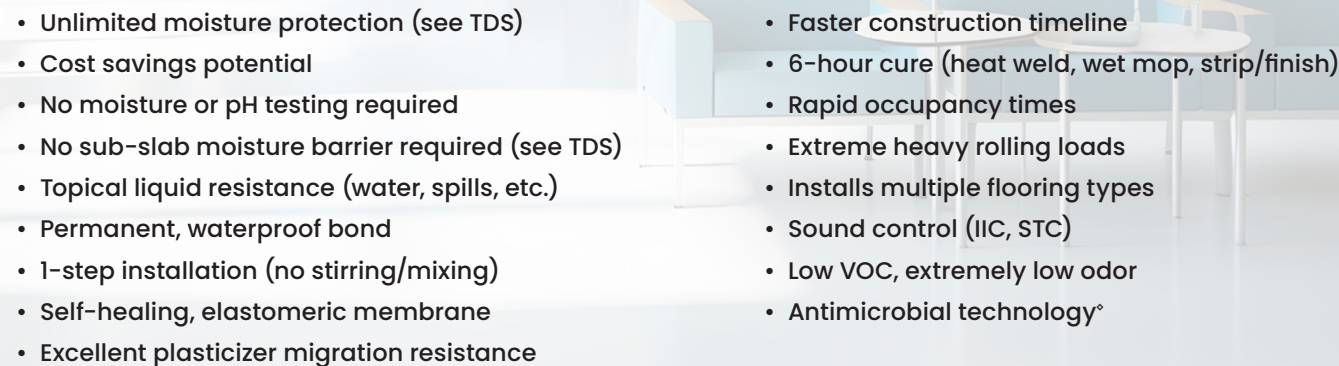
## Hybrid SMP



SIGNATURE LINE®

# RESOLUTE®

## UNLIMITED MOISTURE VAPOR BARRIER, HARD-SET, ELASTOMERIC ADHESIVE

- 
- Unlimited moisture protection (see TDS)
  - Cost savings potential
  - No moisture or pH testing required
  - No sub-slab moisture barrier required (see TDS)
  - Topical liquid resistance (water, spills, etc.)
  - Permanent, waterproof bond
  - 1-step installation (no stirring/mixing)
  - Self-healing, elastomeric membrane
  - Excellent plasticizer migration resistance
  - Faster construction timeline
  - 6-hour cure (heat weld, wet mop, strip/finish)
  - Rapid occupancy times
  - Extreme heavy rolling loads
  - Installs multiple flooring types
  - Sound control (IIC, STC)
  - Low VOC, extremely low odor
  - Antimicrobial technology<sup>®</sup>



INDOOR/OUTDOOR



## APPLICATION

## Resilient Collection

## Modified Acrylic

SIGNATURE LINE®

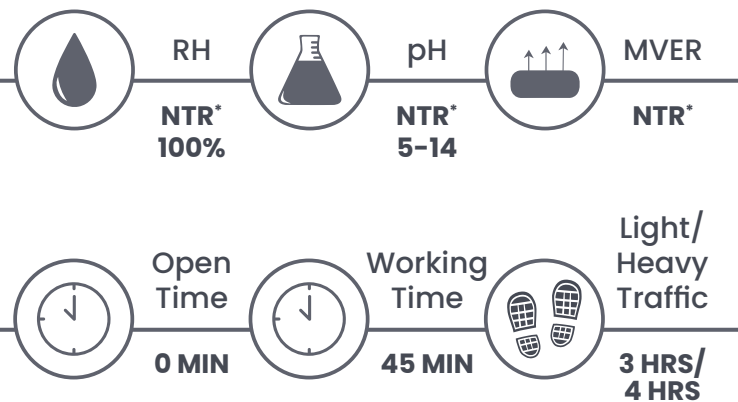
# PINNACLE®

## HARD-SET, TRANSITIONAL PRESSURE SENSITIVE® ADHESIVE

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• Aggressive tack, fast grab</li> <li>• High moisture tolerance</li> <li>• Permanent, waterproof bond</li> <li>• High-strength, elastomeric bond</li> <li>• Ideal for heavy rolling loads</li> <li>• Immediate access for light traffic</li> </ul> | <ul style="list-style-type: none"> <li>• Installs multiple flooring types</li> <li>• ColorReady® technology</li> <li>• Excellent plasticizer migration resistance</li> <li>• Low VOC, extremely low odor</li> <li>• Antimicrobial technology*</li> </ul> |
|---|--|



## Notes

[illegible]

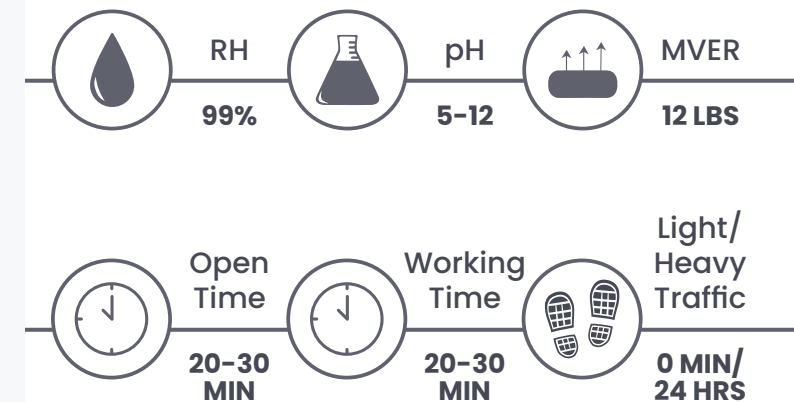
**COVERAGE:** 50-250 ft<sup>2</sup>/gal  
**AVAILABLE IN:** 2 and 4 gal  
**SHELF LIFE:** 1 year



\*NTR = No Testing Required | \*\*Sound ratings based on 6" concrete slab overlaid with 3.2 mm LVP flooring  
NOTE: Exterior applications warranted only with approved exterior rated flooring products. | \*Made with Meta-Sept™ anti-microbial agents that will provide its wet and dry films with protection from fungal growth. This protection is determined using the ASTM G21 test method.

PAGE 8 //65 | TAYLORADHESIVES.COM | MERIDIANADHESIVES.COM

## Notes

[illegible]

**COVERAGE:** 150-350 ft<sup>2</sup>/gal  
**AVAILABLE IN:** 1 and 4 gal  
**SHELF LIFE:** 2 years



\*Data reference PSA usage only. See technical data sheet for complete details  
NOTE: Pinnacle is a high moisture tolerant adhesive but does not provide moisture protection.  
\*Made with Meta-Sept™ anti-microbial agents that will provide its wet and dry films with protection from fungal growth. This protection is determined using the ASTM G21 test method.

PAGE 9 // 65



## Resilient Collection

## Modified Acrylic

SIGNATURE LINE®

# DYNAMIC<sup>®</sup>

## FIRM-SET, MODIFIED TRANSITIONAL PRESSURE SENSITIVE® ADHESIVE

- 
- Aggressive tack, fast grab
  - High moisture tolerance
  - High-strength, water-resistant bond
  - Repositionable installation
  - Immediate access for light traffic
  - Handles heavy rolling loads
  - Attractive price point
  - Installs multiple flooring types
  - 12 hours of working time
  - ColorReady® technology
  - Simple installation
  - Elastomeric bond
  - Plasticizer migration resistance
  - Low VOC, extremely low odor
  - Antimicrobial technology\*



**CAN ALSO BE USED  
WITH MANY  
CARPET FLOORING  
APPLICATIONS**

## Resilient Collection

Synthetic Latex

SIGNATURE LINE®

# STEADFAST®

## CLEAR THIN SPREAD, VCT ADHESIVE

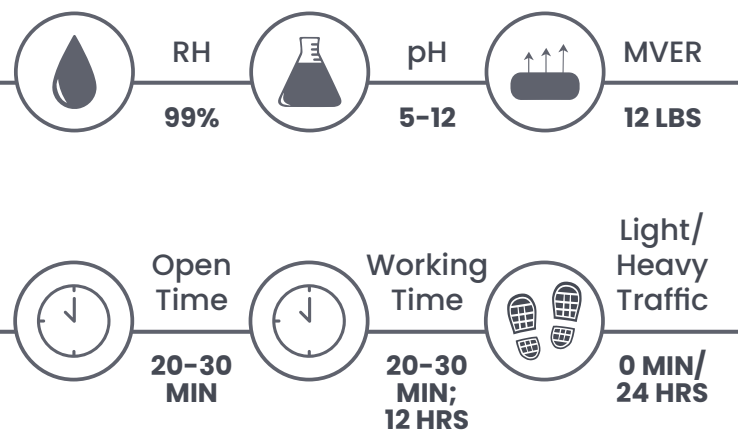
- 
- High strength, water-resistant bond
  - Immediate access for light traffic
  - Competitive price point
  - 24 hours of working time
  - Warranted over cutback residue (see TDS)
  - Simple installation
  - Elastomeric bond
  - Handles heavy rolling loads
  - Designed specifically for VCT flooring
  - Low VOC, extremely low odor
  - Antimicrobial technology\*



## Notes

[illegible]

## Notes

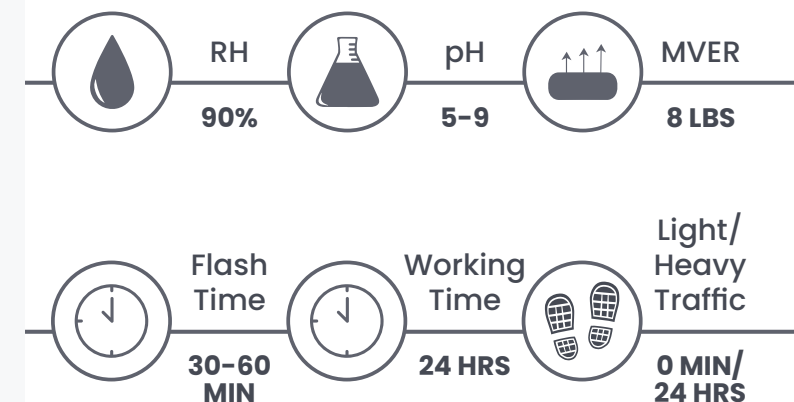
[illegible]

**COVERAGE:** 50-350 ft<sup>2</sup>/gal  
**AVAILABLE IN:** 1 and 4 gal  
**SHELF LIFE:** 2 years



\*Data reference PSA usage only. See technical data sheet for complete details  
NOTE: Dynamic is a high moisture tolerant adhesive but does not provide moisture protection.  
\*Made with Meta-Sept™ anti-microbial agents that will provide its wet and dry films with protection from fungal growth. This protection is determined using the ASTM G21 test method.

PAGE 10 // 65 | TAYLORADHESIVES.COM | MERIDIANADHESIVES.COM



**COVERAGE:** 220-300 ft<sup>2</sup>/gal  
**AVAILABLE IN:** 1 and 4 gal  
**SHELF LIFE:** 2 years



\*Made with Meta-Sept™ anti-microbial agents that will provide its wet and dry films with protection from fungal growth. This protection is determined using the ASTM G21 test method.



RESILIENT COLLECTION

Synthetic Latex



ESSENTIALS LINE

2062

SOLVENT-FREE, FIBERGLASS  
SHEET SEAM SEALER

COVERAGE: 225 lf/8oz  
AVAILABLE IN: 8 oz  
SHELF LIFE: 2 years



RESILIENT COLLECTION

Synthetic Latex



ADDITIONAL ITEMS

2037

FIBERGLASS BACKED SHEET VINYL  
PRESSURE SENSITIVE® ADHESIVE

COVERAGE: Up to 350 ft²/gal  
AVAILABLE IN: 1 and 4 gal  
SHELF LIFE: 2 years



RESILIENT COLLECTION

2-Part Epoxy



ADDITIONAL ITEMS

501

SOLVENT-FREE EPOXY  
FLOORING ADHESIVE

COVERAGE: 180-250 ft²/gal  
AVAILABLE IN: 1 gal  
SHELF LIFE: 1 year



Notes

Notes section with 15 horizontal lines for writing.

**DYNAMIC®**

Time is money, save both across multiple flooring types with the first in ultimate adaptability


**RESOLUTE®**

Trusted by professionals for unmatched performance in heavy use and critical applications



## RESILIENT COLLECTION *approved flooring types*

**NOTE:** Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart below.








FLOORING TYPE		RESOLUTE®	PINNACLE®	DYNAMIC®
RESILIENT	LINOLEUM			
	MODULAR (LVP, LVT)			
	MODULAR (RIGID CORE - DRYBACK)			
	MODULAR (SVT, VET)			
	MODULAR (VCT)			
	MODULAR (WOVEN)			
	RUBBER (CRUMB)			
	RUBBER (SHEET & TILE)			
	SHEET (FELT-BACKED)			
	SHEET (FIBERGLASS)			
	SHEET (HETEROGENEOUS)			
	SHEET (HOMOGENEOUS)			
	SHEET (WOVEN)			
	STAIR TREADS (RUBBER, VINYL)			
WOOD	ACRYLIC INFUSED PLANK			
	BAMBOO (STRAND WOVEN)			
	BAMBOO (NOT STRAND WOVEN)			
	CORK (FLOORING)			
	CORK (CORK-BACKED HARD SURFACE)			
	CORK (UNDERLAYMENT)			
	HARDWOOD (ENGINEERED, PARQUET)			
	HARDWOOD (SOLID)			
CARPET	ARTIFICIAL TURF (SEE EACH PRODUCT'S TDS)			
	BROADLOOM (6-FT VINYL-BACKED)		 	 
	BROADLOOM (ACTION-BAC, JUTE-BACK)			
	BROADLOOM (CARPET PAD)			
	BROADLOOM (DOUBLE STICK - CARPET TO CUSHION)			
	BROADLOOM (DOUBLE STICK - CUSHION TO SUBSTRATE)			
	BROADLOOM (HOT-MELTED-BACKED)			
	BROADLOOM (HP & VINYL-BACKED)			 
	BROADLOOM (NON-VINYL-BACKED PATTERNED)			
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)			
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)			
	BROADLOOM (WOVEN-BACKED)			
	MODULAR (HARD-BACKED CARPET TILE)			 
	MODULAR (SOFT-BACKED CARPET TILE)			
	MODULAR (WALK-OFF CARPET TILE)			

[illegible]

**Scan for up-to-date product information.**



RESILIENT COLLECTION *at a glance*

							
	RESOLUTE <sup>®</sup>	PINNACLE <sup>®</sup>	DYNAMIC <sup>®</sup>	STEADFAST <sup>®</sup>	2062	2037	501
PRODUCT TAGLINE	Unlimited Moisture Vapor Barrier, Hard-Set, Elastomeric Adhesive	Hard-Set, Transitional Pressure Sensitive Adhesive	Firm-Set, Modified Transitional Pressure Sensitive Adhesive	Clear Thin Spread, Vct Adhesive	Solvent-Free, Fiberglass Sheet Seam Sealer	Fiberglass-Backed Sheet Vinyl Pressure Sensitive Adhesive	Solvent-Free Epoxy Flooring Adhesive
BASE CHEMISTRY	Hybrid SMP	Modified Acrylic	Modified Acrylic	Synthetic Latex	Synthetic Latex	Synthetic Latex	2-Part Epoxy
CURING METHOD	Moisture Cure	Proprietary Cross-Linking	Proprietary Modified Cross-Linking	Evaporation	Evaporation	Evaporation	Reactive
MOISTURE CONTROL	100% RH	No	No	No	No	No	No
RH	NTR* (100%)	99%	99%	90%	N/A	85%	75%
PH	NTR* (5-14)	5-12	5-12	5-9	N/A	5-9	5-9
MVER	NTR*	12 lbs	12 lbs	8 lbs	N/A	5 lbs	3 lbs
OPEN TIME	0 min	20-30 min (Semi-wet)	20-30 min (Semi-wet)	N/A	N/A	N/A	10 min
FLASH TIME	10 min	30-60 min	30-60 min (PSA)	30-60 min	N/A	30-60 min (PSA)	N/A
WORKING TIME	45 min	20-30 min (Semi-Wet); 3 hrs (PSA)	20-30 min (Semi-Wet); 12 hrs (PSA)	24 hrs	5-10 min	12 hrs	45 min
CURE TIME	6 hrs	12 hrs	12 hrs	24 hrs	24 hrs	24 hrs	24 hrs
LIGHT TRAFFIC	3 hrs	0 min (PSA); 12 hrs (Semi-Wet)	0 min (PSA); 12 hrs (Semi-Wet)	0 min	6 hrs	0 min	12 hrs
HEAVY TRAFFIC	4 hrs	24 hrs	24 hrs	24 hrs	6 hrs	48 hrs	24 hrs
ROLLING LOADS	8 hrs	48 hrs	48 hrs	48 hrs	N/A	N/A	24 hrs
SOUND DATA	STC: 66 dB IIC: 68 dB ΔIIC: 18 dB	N/A	N/A	N/A	N/A	N/A	N/A
VOCS	< 0.1 g/L	< 14 g/L	< 11 g/L	< 3 g/L	< 13 g/L	< 8 g/L	< 0 g/L

\*NTR = No Testing Required

RESILIENT COLLECTION *approved installation tools*

PRODUCT	FLOORING TYPE	TOOL	COVERAGE
RESOLUTE <sup>®</sup>	<b>RESILIENT:</b> Modular (LVP, LVT, SVT, VCT, VET), <b>Sheet</b> (felt-backed, fiberglass, heterogeneous, homogeneous, woven)	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/16" x 1/32" x 1/32" U Notch	180-250 ft²/gal
	<b>RESILIENT:</b> Linoleum, <b>Modular</b> (rigid core [dryback] woven), <b>Rubber</b> (crumb, sheet tile), <b>Stair Treads</b> (rubber vinyl) <b>CARPET:</b> Modular (hard-backed, soft-backed, walk-off) <b>WOOD:</b> Cork (flooring, cork-backed hard surface, underlayment)	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/16" x 1/16" x 1/16" Sq Notch	75-125 ft²/gal
	<b>CARPET:</b> Artificial Turf	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/8" x 1/8" x 1/16" U Notch	50-65 ft²/gal
PINNACLE <sup>®</sup>	<b>RESILIENT:</b> Modular (LVP/LVT [non-porous], SVT, VCT, VET), <b>Sheet</b> (heterogeneous/homogeneous/woven [non-porous]) <b>CARPET:</b> Broadloom (6 ft vinyl-backed) <b>WOOD:</b> Cork (cork-backed hard surface, underlayment)	<b>BOND ONLY</b> 1/16" x 1/32" x 1/32" U Notch	220-260 ft²/gal
	<b>RESILIENT:</b> Linoleum, <b>Modular</b> (LVP/LVT [porous], rigid core [dryback], woven) <b>Rubber</b> (crumb, sheet, tile), <b>Sheet</b> (heterogeneous/homogeneous/woven [porous]), <b>Stair Treads</b> (rubber/vinyl) <b>CARPET:</b> Broadloom (6 ft vinyl-backed,) <b>WOOD:</b> Cork (cork-backed hard surface, underlayment)	<b>BOND ONLY</b> 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal
	<b>RESILIENT:</b> Sheet (fiberglass)	<b>BOND ONLY</b> 3/8" Short Nap Paint Roller	Up to 350 ft²/gal
DYNAMIC <sup>®</sup>	<b>RESILIENT:</b> Modular (LVP/LVT [non-porous], SVT, VCT, VET), <b>Sheet</b> (heterogeneous/homogeneous [non-porous]) <b>CARPET:</b> Modular (hard-backed/soft-backed [non-porous])	<b>BOND ONLY</b> 1/16" x 1/32" x 1/32" U Notch	220-260 ft²/gal
	<b>RESILIENT:</b> Linoleum, <b>Modular</b> (LVP/LVT [porous], rigid core [dryback]) <b>Rubber</b> (crumb, sheet, tile), <b>Sheet</b> (heterogeneous/homogeneous [porous]), <b>Stair Treads</b> (rubber/vinyl [porous]) <b>CARPET:</b> Broadloom (6 ft vinyl-backed, double-stick-cushion-to-substrate) <b>Modular</b> (hard-backed/soft-backed [porous], walk-off) <b>WOOD:</b> Cork (cork-backed hard surface, underlayment)	<b>BOND ONLY</b> 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal
	<b>CARPET:</b> Broadloom (Action-Bac, jute-back, hot-melt-backed, HP & vinyl-backed, polyurethane, rubber-backed, unitary Action-Bac)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	<b>CARPET:</b> Broadloom (double-stick carpet-to-cushion, unitary, woven-backed)	<b>BOND ONLY</b> 1/8" x 1/8" 1/16" U Notch	50-65 ft²/gal (6-7 yd²/gal)
STEADFAST <sup>®</sup>	<b>RESILIENT:</b> Sheet (fiberglass) <b>CARPET:</b> Modular (hard-backed)	<b>BOND ONLY</b> 3/8" Short Nap Paint Roller	Up to 350 ft²/gal
	<b>RESILIENT:</b> Modular (VCT [porous])	<b>BOND ONLY</b> 1/16" x 1/32" x 1/32" U Notch	220-260 ft²/gal
	<b>RESILIENT:</b> Modular (VCT [non-porous])	<b>BOND ONLY</b> 1/16" x 1/32" 5/64" U Notch	Up to 300 ft²/gal
2062	<b>RESILIENT:</b> Sheet (fiberglass)	Applicator Tip	225 lf/8oz
2037	<b>RESILIENT:</b> Sheet (fiberglass)	<b>BOND ONLY</b> 3/8" Short Nap Paint Roller	Up to 350 ft²/gal
501	<b>RESILIENT:</b> Modular (LVP, LVT, VCT), <b>Sheet</b> (homogeneous, vinyl), <b>Stair Treads</b> (rubber/vinyl)	<b>BOND ONLY</b> 1/16" x 1/32" x 1/32" U Notch	180-250 ft²/gal



Scan for up-to-date product information.



Download on the App Store



GET IT ON Google Play



# THE WOOD COLLECTION

## Signature Line®

- **RIDGELINE®**  
UNLIMITED MOISTURE PROTECTION AND SOUND CONTROL  
MODIFIED SILANE ADHESIVE
- **IRONWOOD®**  
95% MOISTURE PROTECTION AND SOUND CONTROL MODIFIED  
SILANE ADHESIVE
- **ASPEN®**  
90% MOISTURE PROTECTION MODIFIED SILANE ADHESIVE
- **IRONWOOD® GLUE ASSIST**  
WOOD FLOORING GLUE ASSIST ADHESIVE

## Essentials Line

- **ALPINE™**  
UNLIMITED MOISTURE PROTECTION URETHANE  
ADHESIVE
- **TIMBERLINE™**  
90% MOISTURE-CURED URETHANE ADHESIVE
- **REPAIR™**  
ENGINEERED WOOD FLOOR REPAIR ADHESIVE/KIT
- **2049**  
FLOATING FLOOR TONGUE AND GROOVE ADHESIVE



## Wood Collection

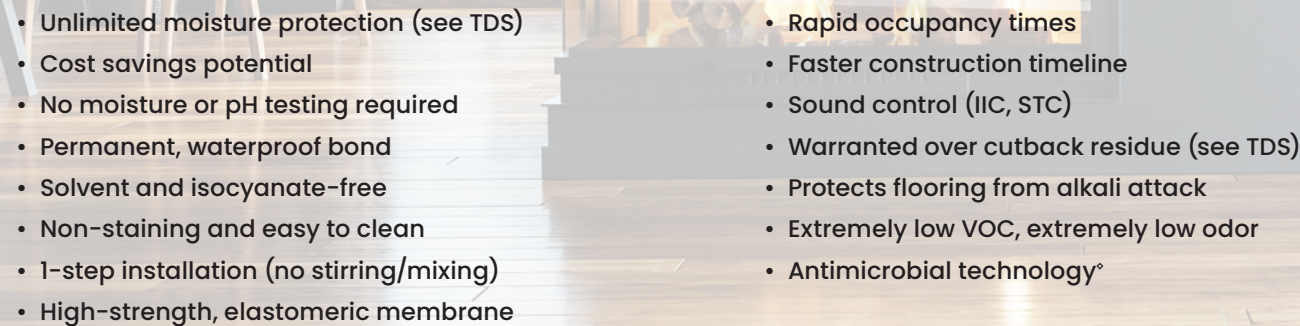
## Hybrid SMP



SIGNATURE LINE®

# RIDGELINE®

## UNLIMITED MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

- 
- Unlimited moisture protection (see TDS)
  - Cost savings potential
  - No moisture or pH testing required
  - Permanent, waterproof bond
  - Solvent and isocyanate-free
  - Non-staining and easy to clean
  - 1-step installation (no stirring/mixing)
  - High-strength, elastomeric membrane

- Rapid occupancy times
  - Faster construction timeline
  - Sound control (IIC, STC)
  - Warranted over cutback residue (see TDS)
  - Protects flooring from alkali attack
  - Extremely low VOC, extremely low odor
  - Antimicrobial technology\*



## Wood Collection


## Hybrid SMP



SIGNATURE LINE®

# IRONWOOD

## 95% MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

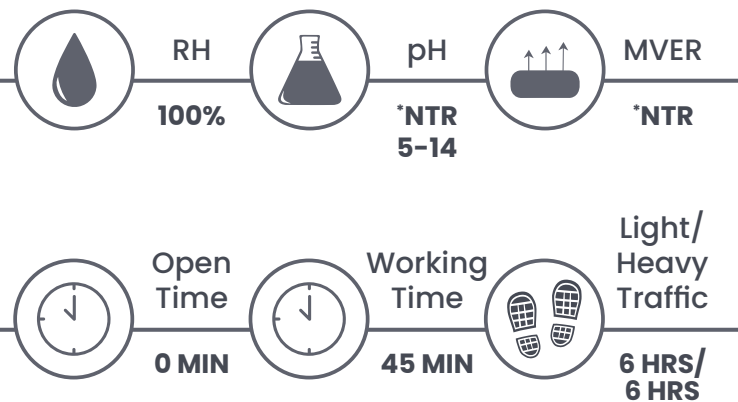
- 
- 95% moisture protection (see TDS)
  - Permanent, waterproof bond
  - Solvent and isocyanate-free
  - Non-staining and easy to clean
  - 1-step installation (no stirring/mixing)
  - High-strength, elastomeric membrane
  - Rapid occupancy times
  - Sound control (IIC, STC)
  - Warranted over cutback residue (see TDS)
  - Protects flooring from alkali attack
  - Extremely low VOC, extremely low odor
  - Antimicrobial technology\*



## Notes

[illegible]

## Notes

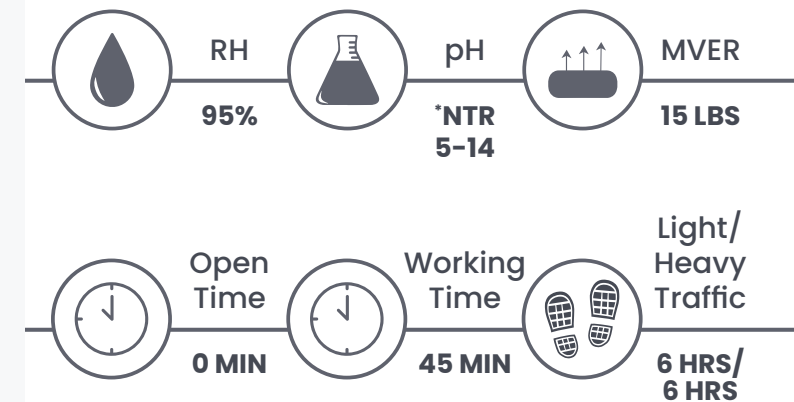
[illegible]

**COVERAGE:** 20-70 ft<sup>2</sup>/gal  
**AVAILABLE IN:** 4 gal  
**SHELF LIFE:** 1 year



\*Made with Meta-Sept™ anti-microbial agents that will provide its wet and dry films with protection from fungal growth. This protection is determined using the ASTM G21 test method.

PAGE 20 //65 | TAYLORADHESIVES.COM | MERIDIANADHESIVES.COM



**COVERAGE:** 20-70 ft<sup>2</sup>/gal  
**AVAILABLE IN:** 4 gal  
**SHELF LIFE:** 1 year



**\*\*Sound ratings based on 6" concrete slab with a suspended wallboard ceiling overlaid with 3/8" engineered hardwood flooring. | \*Made with Meta-Sept™ anti-microbial agents that will provide its wet and dry films with protection from fungal growth. This protection is determined using the ASTM G21 test method.**

PAGE 21 // 65












ESSENTIALS LINE


# 2049

FLOATING FLOOR TONGUE AND GROOVE ADHESIVE


- ANSI Type II water-resistance
  - Permanent, water-resistant bond
  - Non-staining, easy-to-clean
  - Solvent and isocyanate-free
- Zero VOC, extremely low odor
  - Attractive price point
  - Easy application
  - Antimicrobial technology\*




OPEN TIME  
0 MIN




WORKING TIME  
5-10 MIN




CURE TIME  
12 HRS



EXTREMELY  
LOW ODOR



LIGHT TRAFFIC  
24 HRS



HEAVY TRAFFIC  
24 HRS



**COVERAGE:** 400 lf/16oz  
**AVAILABLE IN:** 16 oz  
**SHELF LIFE:** 2 years

\*Made with Meta-Sept™ anti-microbial agents that will provide its wet and dry films with protection from fungal growth. This protection is determined using the ASTM G21 test method.

WOOD COLLECTION

Synthetic Latex



WOOD COLLECTION

Synthetic Latex

ESSENTIALS LINE

# REPAIR™

WOOD REPAIR ADHESIVE

- Repair Hollow Spots

- Kit Contents:**
- Bottle of REPAIR (1 quart)
  - 60cc Plastic Syringe
  - Metal Applicator Tips
  - Drill Bits
  - Dowels
  - Dowel Punch





CURE TIME  
24 HRS



LIGHT TRAFFIC  
24 HRS



HEAVY TRAFFIC  
24 HRS



**COVERAGE:** Dependant upon user  
**AVAILABLE IN:** 1 qt  
**SHELF LIFE:** 1 year

# From our doorstep to yours... faster!

Adhesives may not be your primary business, but your primary business can't function without them.



25

Total locations

18

Site R&D and QC support labs

16

Manufacturing facilities

7

R&D and application development centers

4

Overseas repackaging facilities

LEARN MORE



Our goal is to serve you well. By offering reliable adhesives, hands-on expertise, and unmatched lead times, we help keep your operation running smoothly. Boasting multi-site manufacturing capabilities and extensive warehouse capacity, we provide you with access to quicker deliveries and greater inventories. Experience our personalized service today.

Get started at [meridianadhesives.com](https://meridianadhesives.com)





## WOOD COLLECTION *approved flooring types*









**NOTE:** Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart below.

Flooring Type		Ridgeline®	Ironwood®	Aspen®	Ironwood® Glue Assist
WOOD	ACRYLIC INFUSED PLANK				
	BAMBOO (STRAND WOVEN)				
	BAMBOO (NOT STRAND WOVEN)				
	CORK (FLOORING)				
	CORK (CORK-BACKED HARD SURFACE)				
	CORK (UNDERLAYMENT)				
	HARDWOOD (ENGINEERED, PARQUET)				
	HARDWOOD (SOLID)				
RESILIENT	LINOLEUM				
	MODULAR (LVP, LVT)				
	MODULAR (RIGID CORE – DRYBACK)				
	MODULAR (SVT, VET)				
	MODULAR (VCT)				
	MODULAR (WOVEN)				
	RUBBER (CRUMB)				
	RUBBER (SHEET & TILE)				
	SHEET (FELT-BACKED)				
	SHEET (FIBERGLASS)				
	SHEET (HETEROGENEOUS)				
	SHEET (HOMOGENEOUS)				
	SHEET (WOVEN)				
	STAIR TREADS (RUBBER, VINYL)				
CARPET	ARTIFICIAL TURF (SEE EACH PRODUCT'S TDS)				
	BROADLOOM (6-FT VINYL-BACKED)				
	BROADLOOM (ACTION-BAC, JUTE-BACK)				
	BROADLOOM (CARPET PAD)				
	BROADLOOM (DOUBLE STICK – CARPET TO CUSHION)				
	BROADLOOM (DOUBLE STICK – CUSHION TO SUBSTRATE)				
	BROADLOOM (HOT-MELTED-BACKED)				
	BROADLOOM (HP & VINYL-BACKED)				
	BROADLOOM (NON-VINYL-BACKED PATTERNED)				
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)				
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)				
	BROADLOOM (WOVEN-BACKED)				
	MODULAR (HARD-BACKED CARPET TILE)				
	MODULAR (SOFT-BACKED CARPET TILE)				
	MODULAR (WALK-OFF CARPET TILE)				

[illegible]



WOOD COLLECTION *at a glance*

								
	RIDGELINE <sup>®</sup>	IRONWOOD <sup>®</sup>	ASPEN <sup>®</sup>	IRONWOOD <sup>®</sup> GLUE ASSIST	ALPINE <sup>™</sup>	TIMBERLINE <sup>™</sup>	2049	REPAIR <sup>™</sup>
PRODUCT TAGLINE	Unlimited Moisture Vapor Barrier, Elastomeric Adhesive	95% Moisture Vapor Barrier, Elastomeric Adhesive	90% Moisture Vapor Barrier, Elastomeric Adhesive	Wood Flooring, Glue Assist Adhesive	Unlimited Moisture Vapor Barrier, Urethane Adhesive	90% Moisture Vapor Barrier, Urethane Adhesive	Floating Floor Tongue And Groove Glue	Wood Repair Adhesive
BASE CHEMISTRY	Hybrid SMP	Hybrid SMP	Hybrid SMP	Hybrid SMP	Urethane	Urethane	Synthetic Latex	Synthetic Latex
CURING METHOD	Moisture Cure	Moisture Cure	Moisture Cure	Moisture Cure	Moisture Cured	Moisture Cured	Evaporation	Evaporation
MOISTURE CONTROL	100% RH	95% RH	90% RH	No	100% RH	90% RH	No	No
RH	NTR* (100%)	95%	90%	N/A	NTR* (100%)	90%	N/A	N/A
PH	NTR* (5-14)	NTR* (5-14)	NTR* (5-14)	N/A	NTR* (5-14)	NTR* (5-14)	N/A	N/A
MVER	NTR*	15 lbs	10 lbs	N/A	NTR*	10 lbs	N/A	N/A
OPEN TIME	0 min	0 min	0 min	0 min	10 min	10 min	0 min	N/A
FLASH TIME	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
WORKING TIME	45 min	45 min	45-60 min	45 min	45-60 min	45-60 min	5-10 min	N/A
CURE TIME	12 hrs	12 hrs	12 hrs	12 hrs	24 hrs	24 hrs	12 hrs	24 hrs
LIGHT TRAFFIC	6 hrs	6 hrs	6 hrs	6 hrs	24 hrs	24 hrs	24 hrs	24 hrs
HEAVY TRAFFIC	6 hrs	6 hrs	6 hrs	6 hrs	24 hrs	24 hrs	24 hrs	24 hrs
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
SOUND DATA	STC: 62 dB IIC: 68 dB	STC: 61 dB IIC: 66 dB	N/A	N/A	STC: 62 dB IIC: 63 dB	N/A	N/A	N/A
VOCS	< 0.1 g/L	< 0.1 g/L	< 0.1 g/L	< 0.1 g/L	< 25 g/L	< 10 g/L	0 g/L	< 25 g/L

WOOD COLLECTION *approved installation tools*

PRODUCT	FLOORING TYPE	TOOL	COVERAGE
RIDGELINE <sup>®</sup>	<b>WOOD:</b> Cork (flooring, cork-backed hard-surface, underlayment), <b>Hardwood</b> (parquet)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/8" Sq Notch	60-70 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid) <b>RESILIENT:</b> Rubber (crumb)	<b>BOND ONLY</b> 3/16" x 1/4" x 5/16" V Notch	Up to 50 ft <sup>2</sup> /gal
	<b>WOOD:</b> Planks greater than 6' long and 5" wide	<b>BOND ONLY</b> 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid [planks less than 6' long and 5" wide])	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/4" x 1/4" V Notch	25-30 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid [planks greater than 6' long and 5" wide])	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/2" x 15/32" V Notch	Up to 20 ft <sup>2</sup> /gal
IRONWOOD <sup>®</sup>	<b>WOOD:</b> Cork (flooring, cork-backed hard-surface, underlayment), <b>Hardwood</b> (parquet)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/8" Sq Notch	60-70 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid) <b>RESILIENT:</b> Rubber (crumb)	<b>BOND ONLY</b> 3/16" x 1/4" x 5/16" V Notch	Up to 50 ft <sup>2</sup> /gal
	<b>WOOD:</b> Planks greater than 6' long and 5" wide	<b>BOND ONLY</b> 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid [planks less than 6' long and 5" wide])	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/4" x 1/4" V Notch	25-30 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid [planks greater than 6' long and 5" wide])	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/2" x 15/32" V Notch	Up to 20 ft <sup>2</sup> /gal
ASPEN <sup>®</sup>	<b>WOOD:</b> Cork (flooring, cork-backed hard-surface, underlayment), <b>Hardwood</b> (parquet)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/8" Sq Notch	60-70 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid) <b>RESILIENT:</b> Rubber (crumb)	<b>BOND ONLY</b> 3/16" x 1/4" x 5/16" V Notch	Up to 50 ft <sup>2</sup> /gal
	<b>WOOD:</b> Planks greater than 6' long and 5" wide	<b>BOND ONLY</b> 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid [planks less than 6' long and 5" wide])	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/4" x 1/4" V Notch	25-30 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, solid [planks greater than 6' long and 5" wide])	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/2" x 15/32" V Notch	Up to 20 ft <sup>2</sup> /gal
IRONWOOD <sup>®</sup> GLUE ASSIST	<b>WOOD:</b> Acrylic Infused Plank, Bamboo, <b>Hardwood</b> (engineered, parquet, solid)	<b>BOND ONLY</b> Tip Applicator Included	Dependent upon user
ALPINE <sup>™</sup>	<b>WOOD:</b> Wood flooring up to 5/8" thick, <b>Cork</b> (flooring, cork-backed hard surface, underlayment)	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/4" x 1/4" V Notch	30-35 ft <sup>2</sup> /gal
	Wood flooring greater than 5/8" thick, multi-ply engineered plank	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/2" x 15/32" V Notch	20 ft <sup>2</sup> /gal
	Wood flooring up to 1/2" thick	<b>BOND ONLY</b> 3/16" x 5/32" V Notch	50 ft <sup>2</sup> /gal
	Wood flooring up to 3/4" thick	<b>BOND ONLY</b> 1/4" x 1/4" 1/4" Sq Notch	30 ft <sup>2</sup> /gal
	<b>WOOD:</b> Planks greater than 6' long and 5" wide	<b>BOND ONLY</b> 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft <sup>2</sup> /gal
TIMBERLINE <sup>™</sup>	<b>WOOD:</b> Cork (underlayment), <b>RESILIENT:</b> Rubber (crumb)	<b>BOND ONLY</b> 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft <sup>2</sup> /gal
	<b>WOOD:</b> Cork (flooring, underlayment), <b>Hardwood</b> (parquet) <b>RESILIENT:</b> Rubber (crumb)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/8" Sq Notch	60-70 ft <sup>2</sup> /gal
	<b>WOOD:</b> Acrylic Infused Plank, Bamboo (not strand woven), <b>Cork</b> (flooring, cork-backed hard surface, underlayment), <b>Hardwood</b> (engineered, parquet, solid)	<b>BOND ONLY</b> 3/16" x 1/4" x 5/16" V Notch	Up to 50 ft <sup>2</sup> /gal
	<b>WOOD:</b> Planks greater than 6' long and 5" wide	<b>BOND ONLY</b> 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft <sup>2</sup> /gal
	<b>WOOD:</b> Wood flooring up to 5/8" thick, <b>Cork</b> (flooring, cork-backed hard surface, underlayment)	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/4" x 1/4" V Notch	30-35 ft <sup>2</sup> /gal
	Wood flooring greater than 5/8" thick, multi-ply engineered plank	<b>MOISTURE BARRIER &amp; SOUND CONTROL</b> 1/2" x 15/32" V Notch	20 ft <sup>2</sup> /gal
2049	<b>WOOD:</b> Acrylic Infused Plank, <b>Hardwood</b> (engineered, parquet)	<b>BOND ONLY</b> Applicator tip	400 lf/16oz
REPAIR <sup>™</sup>	<b>WOOD:</b> <b>Hardwood</b> (engineered only)	<b>BOND ONLY</b> Syringe/kit	Dependant upon user



Scan for up-to-date product information.



Download on the App Store



GET IT ON Google Play



# THE CARPET COLLECTION

## Signature Line®

- **AGILE®**  
HARD-SET MULTI-PURPOSE ADHESIVE
- **VERSATILE®**  
SOFT-SET, FULLY REPOSITIONABLE PSA

## Essentials Line

- **900**  
GENERAL PURPOSE LATEX ADHESIVE
- **722**  
WATER-BASED PAD ADHESIVE
- **710**  
MULTI-PURPOSE LATEX ADHESIVE
- **EDGE-LOCK**  
CARPET EDGE SEALING ADHESIVE

## Additional Products

- **720/720-C**  
PAD CEMENT
- **775/775-C**  
CARPET SEAM CEMENT
- **2055**  
FAST-TACK CARPET ADHESIVE
- **2070**  
PREMIUM MULTI-PURPOSE ADHESIVE
- **2089**  
OUTDOOR CARPET ADHESIVE
- **757**  
ALL WEATHER EXTERIOR CARPET ADHESIVE









CARPET COLLECTION

Synthetic Latex



ESSENTIALS LINE

900

GENERAL PURPOSE  
LATEX ADHESIVE

COVERAGE: 90-180 ft<sup>2</sup>/gal (10-20 yd<sup>2</sup>/gal)  
AVAILABLE IN: 4 gal  
SHELF LIFE: 2 years



CARPET COLLECTION

Synthetic Rubber



ESSENTIALS LINE

722

WATER-BASED  
PAD ADHESIVE

COVERAGE: Up to 1000 lf/gal  
AVAILABLE IN: 1 gal  
SHELF LIFE: 2 years



CARPET COLLECTION

Synthetic Rubber



ADDITIONAL ITEMS

720/720-C

SOLVENT-BASED  
PAD CEMENT

COVERAGE: Up to 1000 lf/gal  
AVAILABLE IN: 1 gal  
SHELF LIFE: 1 year



CARPET COLLECTION

Synthetic Rubber



ADDITIONAL ITEMS

775/775-C

NATURAL CARPET  
SEAM CEMENT

COVERAGE: Up to 75 lf/8oz  
AVAILABLE IN: 1 qt  
SHELF LIFE: 1 year



CARPET COLLECTION

Synthetic Latex



ESSENTIALS LINE

710

MULTI-PURPOSE  
LATEX ADHESIVE

COVERAGE: Up to 1200 lf/gal  
AVAILABLE IN: 1 qt and 1 gal  
SHELF LIFE: 6 months



CARPET COLLECTION

Synthetic Latex



ESSENTIALS LINE

EDGE-LOCK

CARPET EDGE  
SEALING ADHESIVE

COVERAGE: Up to 75 lf/8oz  
AVAILABLE IN: 8 oz  
SHELF LIFE: 6 months



CARPET COLLECTION

Synthetic Latex

2055

PERFORMANCE PLUS  
FAST-TACK CARPET  
ADHESIVE

COVERAGE: 50-180 ft<sup>2</sup>/gal (5-20 yd<sup>2</sup>/gal)  
AVAILABLE IN: 4 gal  
SHELF LIFE: 2 years



ADDITIONAL ITEMS

CARPET COLLECTION

Synthetic Latex

2070

POWER-TAC CONTRACT  
GRADE ADHESIVE

COVERAGE: 90-180 ft<sup>2</sup>/gal (10-20 yd<sup>2</sup>/gal)  
AVAILABLE IN: 4 gal  
SHELF LIFE: 2 years



ADDITIONAL ITEMS

CARPET COLLECTION

Modified Acrylic

2089

TUFF-LOK X-LINK  
OUTDOOR CARPET  
ADHESIVE

COVERAGE: 50-120 ft<sup>2</sup>/gal (5-14 yd<sup>2</sup>/gal)  
AVAILABLE IN: 4 gal  
SHELF LIFE: 2 years



ADDITIONAL ITEMS

CARPET COLLECTION

Synthetic Rubber

757

ALL WEATHER EXTERIOR  
CARPET ADHESIVE

COVERAGE: 50-120 ft<sup>2</sup>/gal (5-14 yd<sup>2</sup>/gal)  
AVAILABLE IN: 4 gal  
SHELF LIFE: 1 year



ADDITIONAL ITEMS



## CARPET COLLECTION *approved flooring types*

**NOTE:** Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart below.

FLOORING TYPE		AGILE®	VERSATILE®	900	722
CARPET	ARTIFICIAL TURF (SEE EACH PRODUCT'S TDS)				
	BROADLOOM (6-FT VINYL-BACKED)				
	BROADLOOM (ACTION-BAC, JUTE-BACK)				
	BROADLOOM (CARPET PAD)				
	BROADLOOM (DOUBLE STICK - CARPET TO CUSHION)				
	BROADLOOM (DOUBLE STICK - CUSHION TO SUBSTRATE)				
	BROADLOOM (HOT-MELTED-BACKED)				
	BROADLOOM (HP & VINYL-BACKED)				
	BROADLOOM (NON-VINYL-BACKED PATTERNED)				
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)				
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)				
	BROADLOOM (WOVEN-BACKED)				
	MODULAR (HARD-BACKED CARPET TILE)				
	MODULAR (SOFT-BACKED CARPET TILE)				
	MODULAR (WALK-OFF CARPET TILE)				
	RESILIENT	LINOLEUM			
MODULAR (LVP, LVT)					
MODULAR (RIGID CORE - DRYBACK)					
MODULAR (SVT, VET)					
MODULAR (VCT)					
MODULAR (WOVEN)					
RUBBER (CRUMB)					
RUBBER (SHEET & TILE)					
SHEET (FELT-BACKED)					
SHEET (FIBERGLASS)					
SHEET (HETEROGENEOUS)					
SHEET (HOMOGENEOUS)					
SHEET (WOVEN)					
STAIR TREADS (RUBBER, VINYL)					
WOOD	ACRYLIC INFUSED PLANK				
	BAMBOO (STRAND WOVEN)				
	BAMBOO (NOT STRAND WOVEN)				
	CORK (FLOORING)				
	CORK (CORK-BACKED HARD SURFACE)				
	CORK (UNDERLAYMENT)				
	HARDWOOD (ENGINEERED, PARQUET)				
	HARDWOOD (SOLID)				

[illegible]

Download on the  
**App Store**









GET IT ON  
**Google Play**









**Scan for up-to-date  
product information.**



CARPET COLLECTION *at a glance*

						
	AGILE®	VERSATILE®	900	722	710	EDGE-LOCK
PRODUCT TAGLINE	Hard-Set, Multi-Purpose Adhesive	Soft-Set, Fully-Repositionable Pressure Sensitive Adhesive	General Purpose Latex Adhesive	Water-Based Pad Adhesive	Multi-Purpose Latex Adhesive	Carpet Edge Sealing Adhesive
BASE CHEMISTRY	Synthetic Latex	Modified Acrylic	Synthetic Latex	Synthetic Rubber	Synthetic Latex	Synthetic Latex
CURING METHOD	Evaporation	Evaporation	Evaporation	Evaporation	Evaporation	Evaporation
MOISTURE CONTROL	No	No	No	No	No	No
RH	90%	95%	75%	75%	N/A	N/A
PH	5-9	5-10	5-9	5-9	N/A	N/A
MVER	8 lbs	10 lbs	5 lbs	3 lbs	N/A	N/A
OPEN TIME	15-60 min (direct glue down); 30-60 min (underlayment/double stick cushion to carpet)	N/A	20-30 min	0 min	N/A	N/A
FLASH TIME	N/A	30-60 min	N/A	N/A	N/A	N/A
WORKING TIME	15-120 min (direct glue down); 30-120 min (underlayment/double stick cushion to carpet)	24 hrs	15-120 min	45-60 min	15-30 min	5-10 min
CURE TIME	12 hrs	24 hrs	48 hrs	12 hrs	24 hrs	12 hrs
LIGHT TRAFFIC	12 hrs (direct glue down/underlayment); 24 hrs (double-stick)	0 min	12 hrs	N/A	24 hrs	24 hrs
HEAVY TRAFFIC	24 hrs (direct glue down/underlayment); 48 hrs (double-stick)	24 hrs	24 hrs	N/A	24 hrs	24 hrs
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A	N/A
SOUND DATA	N/A	N/A	N/A	N/A	N/A	N/A
VOCS	< 12 g/L	< 11 g/L	< 13 g/L	< 27 g/L	< 46 g/L	< 10 g/L

						
	2070	2055	2089	720/720-C	757	775/775-C
PRODUCT TAGLINE	Power-tac™ contract grade adhesive	Performance Plus Fast-Tack Carpet Adhesive	Tuff-Lok X-Link™ Outdoor carpet adhesive	Solvent-Based Carpet Pad Cement	All-weather exterior carpet adhesive	Natural Carpet Seam Cement
BASE CHEMISTRY	Synthetic Latex	Synthetic Latex	Modified Acrylic	Synthetic Rubber	Synthetic Rubber	Synthetic Rubber
CURING METHOD	Evaporation	Evaporation	Proprietary Cross-Linking	Evaporation	Evaporation	Evaporation
MOISTURE CONTROL	No	No	No	No	No	No
RH	75%	90%	N/A	N/A	N/A	N/A
PH	5-9	5-9	5-9	N/A	5-9	N/A
MVER	5 lbs	8 lbs	N/A	N/A	N/A	N/A
OPEN TIME	20-30 min	15-60 min (direct glue down); 30-60 min (underlayment/double stick cushion to carpet)	15-60 min (direct glue down); 30-60 min (underlayment/double stick cushion to carpet)	0 min	0 min	N/A
FLASH TIME	N/A	N/A	N/A	N/A	N/A	5-10 min
WORKING TIME	15-120 min	15-120 min (direct glue down); 30-120 min (underlayment/double stick cushion to carpet)	15-120 min (direct glue down); 30-120 min (underlayment/double stick cushion to carpet)	10 min	15-45 min	5-10 min
CURE TIME	48 hrs	12 hrs	12 hrs	N/A	24 hrs	12 hrs
LIGHT TRAFFIC	12 hrs	12 hrs (direct glue down/underlayment); 24 hrs (double-stick)	12 hrs (direct glue down/underlayment); 24 hrs (double-stick)	0 min	6 hrs	24 hrs
HEAVY TRAFFIC	24 hrs	24 hrs (direct glue down/underlayment); 48 hrs (double-stick)	24 hrs (direct glue down/underlayment); 48 hrs (double-stick)	N/A	24 hrs	24 hrs
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A	N/A
SOUND DATA	N/A	N/A	N/A	N/A	N/A	N/A
VOCS	< 13 g/L	< 12 g/L	< 11 g/L	720 = 367 g/L 720-C = 0 g/L	301 g/L	775 = 629 g/L 775-C = 0 g/L



PRODUCT	FLOORING TYPE	TOOL	COVERAGE
AGILE™	<b>CARPET: Broadloom</b> (double-stick cushion-to-substrate, polyurethane, rubber-backed) <b>WOOD: Cork</b> (cork-backed hard surface)	<b>BOND ONLY</b> 3/32" x 3/32" x 3/32" V Notch	90-120 ft <sup>2</sup> /gal (10-14 yd <sup>2</sup> /gal)
	<b>CARPET: Broadloom</b> (Action-Bac, jute-back, hot-melt-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" V Notch	90-120 ft <sup>2</sup> /gal (10-14 yd <sup>2</sup> /gal)
	<b>CARPET: Broadloom</b> (double-stick carpet-to-cushion, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" U Notch	50-65 ft <sup>2</sup> /gal (5-7 yd <sup>2</sup> /gal)
	<b>RESILIENT: Linoleum, Sheet</b> (felt-backed) <b>WOOD: Cork</b> (underlayment)	<b>BOND ONLY</b> 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft <sup>2</sup> /gal (16-20 yd <sup>2</sup> /gal)
VERSATILE™	<b>CARPET: Broadloom</b> (6 ft vinyl-backed, HP & vinyl-backed) <b>RESILIENT: Modular</b> (LVP, LVT, VCT, [non-porous])	<b>BOND ONLY</b> 1/16" x 1/32" x 1/32" U Notch	220-260 ft <sup>2</sup> /gal (24-29 yd <sup>2</sup> /gal)
	<b>CARPET: Broadloom</b> (double-stick cushion-to-substrate) <b>Modular</b> (hard-backed, soft-backed) <b>RESILIENT: Modular</b> (LVP, LVT, VCT, [porous]) <b>WOOD: Cork</b> (underlayment)	<b>BOND ONLY</b> 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft <sup>2</sup> /gal (16-20 yd <sup>2</sup> /gal)
	<b>RESILIENT: Sheet</b> (fiberglass) <b>CARPET: Broadloom</b> (6 ft vinyl-backed, HP & vinyl-backed) <b>Modular</b> (hard-backed)	<b>BOND ONLY</b> 3/8" Short Nap Paint Roller	Up to 350 ft <sup>2</sup> /gal (up to 39 yd <sup>2</sup> /gal)
900	<b>CARPET: Broadloom</b> (Action-Bac, jute-back)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" V Notch	90-120 ft <sup>2</sup> /gal (10-14 yd <sup>2</sup> /gal)
	<b>RESILIENT: Sheet</b> (felt-backed [porous])	<b>BOND ONLY</b> 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft <sup>2</sup> /gal (16-20 yd <sup>2</sup> /gal)
722	<b>CARPET: Broadloom</b> (carpet pad) <b>NOTE: For stretch-in applications only.</b>	<b>BOND ONLY</b> Tip Applicator Included	Up to 1000 lf/gal
710	<b>CARPET: Broadloom</b> (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, polyurethane & rubber-backed, unitary & unitary Action-Bac, woven-backed)	<b>BOND ONLY</b> Tip Applicator Included	Up to 1200 lf/gal
EDGE-LOCK	<b>CARPET: Broadloom</b> (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, polyurethane & rubber-backed, unitary & unitary Action-Bac, woven-backed)	<b>BOND ONLY</b> Tip Applicator Included	Up to 75 lf/8oz
2070	<b>CARPET: Broadloom</b> (Action-Bac, hot-melt-backed, polyurethane & rubber-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" V Notch	90-120 ft <sup>2</sup> /gal (10-14 yd <sup>2</sup> /gal)
	<b>RESILIENT: Sheet</b> (felt-backed)	<b>BOND ONLY</b> 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft <sup>2</sup> /gal (16-20 yd <sup>2</sup> /gal)
2055	<b>CARPET: Broadloom</b> (double-stick cushion-to-substrate, polyurethane, rubber-backed) <b>WOOD: Cork</b> (cork-backed hard surface)	<b>BOND ONLY</b> 3/32" x 3/32" x 3/32" V Notch	90-120 ft <sup>2</sup> /gal (10-14 yd <sup>2</sup> /gal)
	<b>CARPET: Broadloom</b> (Action-Bac, jute-back, hot-melt-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" V Notch	90-120 ft <sup>2</sup> /gal (10-14 yd <sup>2</sup> /gal)
	<b>CARPET: Broadloom</b> (double-stick carpet-to-cushion, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" U Notch	50-65 ft <sup>2</sup> /gal (5-7 yd <sup>2</sup> /gal)
	<b>RESILIENT: Linoleum, Sheet</b> (felt-backed) <b>WOOD: Cork</b> (underlayment)	<b>BOND ONLY</b> 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft <sup>2</sup> /gal (16-20 yd <sup>2</sup> /gal)
2089	<b>OUTDOOR CARPET: Broadloom</b> (Action-Bac, needle-bond, smooth-backed, rubber-backed, urethane foam-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" V Notch	90-120 ft <sup>2</sup> /gal (10-14 yd <sup>2</sup> /gal)
	<b>OUTDOOR CARPET: Broadloom</b> (Latex unitary, rough-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" U Notch	50-65 ft <sup>2</sup> /gal (5-7 yd <sup>2</sup> /gal)
720/720-C	<b>CARPET: Broadloom</b> (carpet pad) <b>NOTE: For stretch-in applications only.</b>	<b>BOND ONLY</b> Applicator Bottle	Up to 1000 lf/gal
757	<b>OUTDOOR CARPET: Broadloom</b> (Action-Bac, needle-bond, smooth-backed, rubber-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" V Notch	90-120 ft <sup>2</sup> /gal (10-14 yd <sup>2</sup> /gal)
	<b>OUTDOOR CARPET: Broadloom</b> (Latex unitary, rough-backed)	<b>BOND ONLY</b> 1/8" x 1/8" x 1/16" U Notch	50-65 ft <sup>2</sup> /gal (5-7 yd <sup>2</sup> /gal)
775/775-C	<b>CARPET: Broadloom</b> (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, rubber-backed, unitary & unitary Action-Bac, woven-backed)	<b>BOND ONLY</b> Applicator Bottle	Up to 75 lf/8oz



Scan for up-to-date product information.



# Adhesives that go the distance...

Meridian’s solutions enrich all aspects of life, from the ordinary to the extraordinary.

LEARN MORE



With 25 sites strategically located in 9 countries, our global presence is your advantage. Meridian Adhesives plays a pivotal role in products that can be found everywhere from the floors you walk on all the way into outer space.

Learn more at [meridianadhesives.com](https://meridianadhesives.com)





# THE MOISTURE + SPECIALTY COLLECTION

## Signature Line®

- **SAHARA®**  
UNLIMITED MOISTURE VAPOR BARRIER,  
ELASTOMERIC MEMBRANE
- **ZEPHYR®**  
95% MOISTURE VAPOR BARRIER, OR ENCAPSULATOR, OR  
PRIMER COATING
- **ENHANCE®**  
SURFACE BOND PROMOTER AND ENCAPSULATOR
- **FINALE®**  
HARD-SET, ELASTOMERIC COVE BASE ADHESIVE
- **ELEVATE®**  
ROLLER APPLIED WALL ADHESIVE FOR VINYL PLANK/TILE
- **GRAVITY®**  
ANTI-SKID SUBSTRATE COATING FOR FLOATING FLOOR  
INSTALLATION

## Essentials Line

- **2025**  
UNIVERSAL LATEX PRIMER COATING
- **TERRAIN™**  
SINGLE COMPONENT MOISTURE CURED URETHANE  
INDOOR/OUTDOOR ARTIFICIAL TURF ADHESIVE

## Additional Products

- **901**  
ODYSSEY TYPE 1 PREMIUM CERAMIC TILE ADHESIVE
- **1N/1N-C**  
CONTACT CEMENT - BRUSH GRADE
- **725**  
ALL PURPOSE WEB SPRAY ADHESIVE













Specialty Collection

Synthetic Latex



SIGNATURE LINE®

ELEVATE®

ROLLER APPLIED WALL ADHESIVE FOR VINYL PLANK/TILE

- Fast and easy roller application
- Aggressive tack, fast grab formula
- Holds planks without slipping/sliding
- Non-staining and easy-to-clean
- Low VOC, extremely low odor

Specialty Collection

Synthetic Latex



SIGNATURE LINE®

GRAVITY®

ANTI-SKID SUBSTRATE COATING FOR FLOATING FLOOR INSTALLATION

- Prevents lateral movement of flooring
- Up to 90% moisture protection
- Simple roller application
- Fast-drying formula
- Releasable with no transfer



Notes

Notes section with 15 horizontal lines for handwritten text.

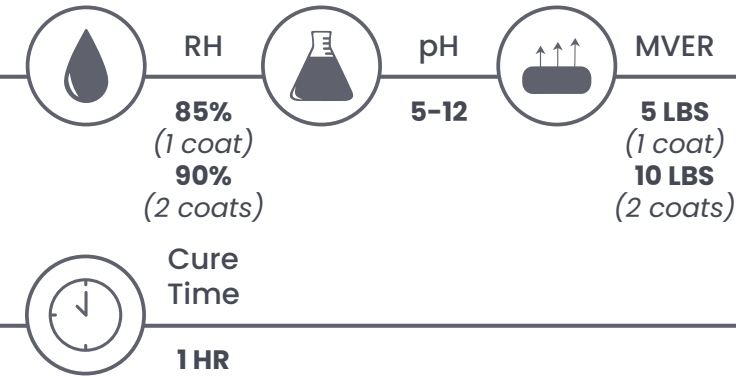
**COVERAGE:** 250-300 ft<sup>2</sup>/gal  
**AVAILABLE IN:** 1 gal  
**SHELF LIFE:** 2 years



NOTE: Only use with 2 mm or thinner products. Do not use on walls exposed to direct sunlight or moisture.

Notes

Notes section with 15 horizontal lines for handwritten text.



**COVERAGE:** Up to 350 ft<sup>2</sup>/gal (1 coat), 200 ft<sup>2</sup>/gal (2 coats)  
**AVAILABLE IN:** 4 gal  
**SHELF LIFE:** 2 years



\*Based on 1- or 2-coat application – see technical data sheet for complete details.



# TERRAIN™

- Can be used with most backing types



\*\* Listed information is intended for indoor applications only. For outdoor applications, refer to TDS.

## Urethane



## 2025

- Primes porous substrates • pH blocker, protects flooring • No stirring/mixing required • Fast, 1-coat, roller application • Fast-drying formula
- Solvent and isocyanate-free • Zero VOC, extremely low odor
- Attractive price point • Antimicrobial technology<sup>®</sup>



Made with Meta-Sept™ anti-microbial agents that will provide its wet and dry films with protection from fungal growth. This protection is determined using the ASTM G21 test method.



## Synthetic Latex

## Synthetic Latex



## 901

**COVERAGE:** 25-50 ft<sup>2</sup>/gal  
**AVAILABLE IN:** 1 and 3.5 gal  
**SHELF LIFE:** 2 years



## Synthetic Rubber



1N/1N-C

**COVERAGE:** Dependant upon user  
**AVAILABLE IN:** 1 pt, 1 qt, 1 gal, and 4 gal  
**SHELF LIFE:** 1 year



### Synthetic Rubber



## 725







**COVERAGE:** Dependant upon user  
**AVAILABLE IN:** 12 oz spray  
**SHELF LIFE:** 1 year










MOISTURE + SPECIALTY COLLECTIONS

at a glance

						
	SAHARA <sup>®</sup>	ZEPHYR <sup>®</sup>	ENHANCE <sup>®</sup>	FINALE <sup>®</sup>	ELEVATE <sup>®</sup>	GRAVITY <sup>®</sup>
PRODUCT TAGLINE	Unlimited Moisture Vapor Barrier, Elastomeric Membrane	95% Moisture Vapor Barrier, Or Encapsulator, Or Primer Coating	Surface Bond Promoter And Encapsulator	Hard-Set, Elastomeric Cove Base Adhesive	Roller Applied Wall Adhesive For Vinyl Plank/Tile	Anti-Skid Substrate Coating For Floating Floor Installation
BASE CHEMISTRY	Hybrid SMP	Synthetic Latex	Hybrid SMP	Modified Acrylic	Synthetic Latex	Synthetic Latex
CURING METHOD	Moisture Cure	Evaporation	Moisture Cure	Evaporation	Evaporation	Evaporation
MOISTURE CONTROL	100% RH	93% RH (1 Coat), 95% RH (2 Coats)	No	N/A	No	85% RH (1 Coat), 90% RH (2 Coats)
RH	NTR* (100%)	93% (1 Coat), 95% (2 Coats)	90%	N/A	N/A	85% (1 Coat), 90% (2 Coats)
PH	NTR* (5-14)	NTR* (5-14)	NTR* (5-14)	N/A	N/A	5-12
MVER	NTR*	10 Lbs (1 Coat); 15 Lbs (2 Coats)	8 Lbs	N/A	N/A	5 Lbs (1 Coat); 10 Lbs (2 Coats)
OPEN TIME	N/A	N/A	N/A	0 min	N/A	N/A
FLASH TIME	N/A	N/A	N/A	N/A	30-60 min	N/A
WORKING TIME	N/A	N/A	N/A	30 min	2 hrs	N/A
CURE TIME	8 hrs	1 hr (per coat)	1-2 hrs	12 hrs	12 hrs	1 hr (per coat)
LIGHT TRAFFIC	N/A	N/A	N/A	N/A	N/A	N/A
HEAVY TRAFFIC	N/A	N/A	N/A	N/A	N/A	N/A
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A	N/A
SOUND DATA	N/A	N/A	N/A	N/A	N/A	N/A
VOCS	< 0.05 g/L	0 g/L	< 0.05 g/L	< 8 g/L	< 8 g/L	< 1 g/L

					
	TERRAIN <sup>™</sup>	2025	901	1N/1N-C	725
PRODUCT TAGLINE	Single component moisture cured urethane indoor/outdoor artificial turf adhesive**	Universal Latex Primer Coating	Premium Ceramic Tile Adhesive - Type I	Contact Cement - Brush Grade	All Purpose Web Spray Adhesive
BASE CHEMISTRY	Urethane	Synthetic Latex	Synthetic Latex	Synthetic Rubber	Synthetic Rubber
CURING METHOD	Moisture Cured	Evaporation	Evaporation	Evaporation	Evaporation
MOISTURE CONTROL	90% RH	No	No	No	No
RH	90%	75%	N/A	N/A	N/A
PH	NTR* (5-14)	NTR* (5-14)	5-9	5-9	N/A
MVER	10 lbs	5 lbs	N/A	N/A	N/A
OPEN TIME	10 min	N/A	0 min	N/A	N/A
FLASH TIME	N/A	N/A	N/A	0-10 min	0-10 min
WORKING TIME	45-60 min	N/A	30-45 min	30-45 min	30-45 min
CURE TIME	24 hrs	30-60 min	12 hrs	24 hrs	24 hrs
LIGHT TRAFFIC	24 hrs	N/A	48 hrs	N/A	N/A
HEAVY TRAFFIC	24 hrs	N/A	48 hrs	N/A	N/A
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A
SOUND DATA	N/A	N/A	N/A	N/A	N/A
VOCS	< 10 g/L	0 g/L	< 34 g/L	1N = 648 g/L 1N-C = 0 g/L	0 g/L



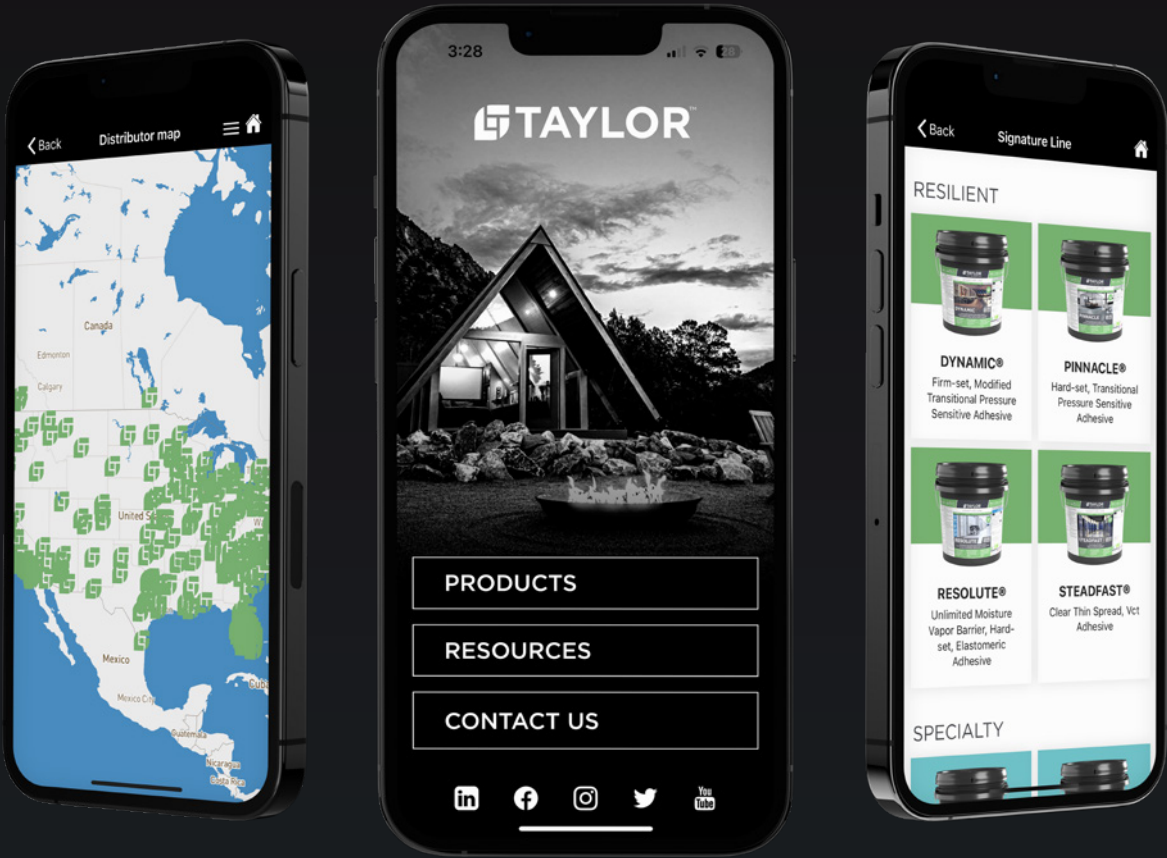
MOISTURE + SPECIALTY COLLECTIONS

approved installation tools

	PRODUCT	FLOORING TYPE	TOOL	COVERAGE
MOISTURE	SAHARA <sup>®</sup>	For use under all glue-down, loose-lay, and floating floors	MOISTURE BARRIER 1/8" x 1/8" x 1/16" V Notch	90-120 ft <sup>2</sup> /gal
	ZEPHYR <sup>®</sup>	For use under all glue-down, loose-lay, and floating floors	MOISTURE BARRIER 3/8" Short Nap Paint Roller	350 ft <sup>2</sup> /gal (1 coat) 200 ft <sup>2</sup> /gal (2 coats)
SPECIALTY	ENHANCE <sup>®</sup>	For use under all glue-down, loose-lay, and floating floors	PRIMER ONLY 1/2" Short Nap Paint Roller	Up to 250 ft <sup>2</sup> /gal
	FINALE <sup>®</sup>	Approved base types: rubber, vinyl, rubber-vinyl blends, carpet	BOND ONLY 3/32" x 3/32" x 3/32" V Notch	2" base - up to 560 lf/gal 4" base - up to 280 lf/gal 6" base - up to 187 lf/gal
	ELEVATE <sup>®</sup>	Approved LVP, LVT	BOND ONLY 3/8" Short Nap Paint Roller	250-300 ft <sup>2</sup> /gal
	GRAVITY <sup>®</sup>	Approved floating flooring products	MOISTURE BARRIER & ANTI-SKID 3/8" Short Nap Paint Roller	Up to 350 ft <sup>2</sup> /gal
	TERRAIN <sup>™</sup>	Artificial Turf (Action-Bac, needle-bond, smooth-backed, rubber-backed)	BOND ONLY 1/8" x 1/8" x 1/16" V Notch	90-120 ft <sup>2</sup> /gal
		Artificial Turf (Latex unitary, rough-backed)	BOND ONLY 1/8" x 1/8" x 1/16" U Notch	50-65 ft <sup>2</sup> /gal
	2025	For use under all glue-down, loose-lay, and floating floors	PRIMER ONLY 3/8" Short Nap Paint Roller	300-450 ft <sup>2</sup> /gal
	901	Ceramic wall and floor tile	BOND ONLY 3/16" x 5/16" V Notch	30-50 ft <sup>2</sup> /gal
		Ceramic wall and floor tile	BOND ONLY 1/4" x 1/4" x 1/4" Sq Notch	25-30 ft <sup>2</sup> /gal
	1N/1N-C	See Technical Data Sheet for complete information	BOND ONLY Brush applied	Dependant upon user
	725	See Technical Data Sheet for complete information	BOND ONLY Aerosol spray	Dependant upon user

ON THE JOB?

THERE'S AN APP FOR THAT!



We offer the most user-friendly, digital experience in the flooring adhesive industry. Download our app to stay up-to-date on all things TAYLOR.



Scan for up-to-date product information.



Download on the App Store



GET IT ON Google Play





# THE TAYLOR *technical department*

Technical Department Hours: Monday – Friday 8am to 8pm EST | 706-712-5823

We are dedicated to the training and success of installers, sales representatives, and the entire flooring industry. Our experienced technicians possess the knowledge and expertise that help uphold our brand promise of being With You Every Step™.

## What’s inside our TAYLOR Technical & Training Center (T³C)?

Located in Dalton, GA, our T³C serves as a central support hub and an extension of our customers technical departments. Inside our T³C facility you will find the following:

- Training classroom
- Product testing rooms
- Hands-on application areas
- Custom rolling-load testing lab
- Moisture modules
- Environmental chamber
- TAYLOR TIME studio
- Conference room
- Shipping/Receiving center
- Technical team offices

## How our Technical Team can help

No matter where you are, our Technical Team is here to help. We can host you at our facility, come to your job-site or locations, or assist you through digital options.

- T³C (Taylor Technical & Training Center)
- Flooring manufacturing plants
- Flooring manufacturer testing facilities
- Distributor locations
- On-site locations
- Email/text
- On-call 706-712-5823
- Video chats
- Live webinars
- Installation videos
- How-to videos
- Bilingual support



Scan QR code to find out more.

## Technical Team Services

Our product testing, troubleshooting and training often make the difference between success and failure. English and Spanish technical support are available throughout North America.

### TRAINING:

- Product knowledge
- Installation skills
- Best practices
- General knowledge
- Installation techniques
- Product selection
- Substrate preparation
- Adhesive application
- Terminology
- Acclimation
- Custom sessions
- How-to-videos

### TROUBLESHOOTING:

- Moisture issues
- Substrate history
- Substrate conditions
- Substrate preparation
- Adhesives/coatings
- Flooring materials
- Warranty coverage
- Job-site inspections
- Compatibility
- Peaking, gapping, cupping

### TESTING OUR PRODUCTS:

- RH – Moisture tolerance
- MVER – Moisture vapor transmission
- pH – Alkali tolerance
- Viscosity/spread-ability
- Temperature tolerance
- Traffic times
- Peel/sheer strength
- Bond strength
- Compatibility/performance
- Rolling-load testing

### TESTING YOUR PRODUCTS:

- Strength
- Dimensional stability
- Plasticizer migration
- Moisture tolerance
- Environmental performance (heat, cold, humidity)



# sustainability

## INDUSTRY FIRSTS

### CERTIFICATIONS

- 1991** Green Label (Plus®)
- 2007** GREENGUARD
- 2008** USDA BioPreferred®
- 2013** FloorScore®
- 2014** Cradle to Cradle®

### ACHIEVEMENTS

- 1989** Developed the first solvent-free flooring adhesive in the U.S.
- 1995** Chosen by the EPA as the Exclusive Adhesive for their headquarters
- 2006** Introduced our first solvent and isocyanate-free wood adhesive
- 2019** Added our products to the mindful MATERIALS Library

### Certification Key



CRI GreenLabel Plus



FloorScore



Greenguard



Material Health – Bronze



Material Health – Silver



Red List Free

Most of our products can be found in the mindful Materials transparency library.

## RESILIENT COLLECTION

	RESOLUTE®	PINNACLE®	DYNAMIC®	STEADFAST®	2062	2037	501

## CARPET COLLECTION

	AGILE®	VERSATILE®	900	722	2055	2070	2089

## WOOD COLLECTION

	RIDGELINE®	IRONWOOD®	ASPEN®	IRONWOOD® GLUE ASSIST	2049

## MOISTURE + SPECIALTY COLLECTIONS

	SAHARA®	ZEPHYR®	ENHANCE®	FINALE®	ELEVATE®	GRAVITY®	2025





Our divisions collaborate across internal organizational boundaries to supply multiple markets with innovative adhesive and bonding technologies, backed by industry-leading research and development.



The entire Meridian portfolio is specialized in adhesive technology



Enhanced product innovation and technical resources



Access to global perspective and market intel



Leverage raw material buying power (supply resilience)



Manufacturing, warehousing and logistics support



Access to capital expenditures and expansion projects

We actively support many well-respected industry associations and groups. Our goal is to help further growth and service throughout our industry. Thank you for supporting us in return.

LEARN MORE





PACKAGING & SHIPPING

	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/UNIT	UNIT WEIGHT*	UNITS/PALLET	WEIGHT/PALLET	SHELF LIFE
RESILIENT	RESOLUTE*	2 gal	Plastic Pail	719692-022671	1	19 lbs	60	1,190 lbs	1 year
		4 gal	Plastic Pail	719692-024057	1	37 lbs	48	1,826 lbs	
	PINNACLE*	1 gal	Plastic Pail	719692-022657	4	35 lbs	45	1,625 lbs	2 years
		4 gal	Plastic Pail	719692-022640	1	35 lbs	48	1,730 lbs	
	DYNAMIC*	1 gal	Plastic Pail	719692-022626	4	37 lbs	45	1,715 lbs	2 years
		4 gal	Plastic Pail	719692-022619	1	37 lbs	48	1,826 lbs	
	STEADFAST*	1 gal	Plastic Pail	719692-023029	4	36 lbs	45	1,670 lbs	2 years
		4 gal	Plastic Pail	719692-023012	1	36 lbs	48	1,778 lbs	
	2062	8 oz	Squeeze Bottle	719692-021063	12	8 lbs	60	530 lbs	2 years
	2037	1 gal	Plastic Pail	719692-021117	4	38 lbs	45	1,760 lbs	2 years
		4 gal	Plastic Pail	719692-021049	1	38 lbs	48	1,874 lbs	
	501	1 gal	Plastic Pail	719692-002260	2	13 lbs	75	1,025 lbs	1 year
WOOD	RIDGELINE*	4 gal	Plastic Pail	719692-022572	1	44 lbs	48	2,162 lbs	1 year
	IRONWOOD*	4 gal	Plastic Pail	719692-022633	1	43 lbs	48	2,114 lbs	1 year
	ASPEN*	4 gal	Plastic Pail	719692-023388	1	43 lbs	48	2,114 lbs	1 year
	IRONWOOD* GLUE ASSIST	28 oz	Plastic Cartridge	719692-023623	12	28 lbs	40	1,170 lbs	1 year
		20 oz	Sausage Tube	719692-023999	12	20	60	1,250 lbs	
	ALPINE™	4 gal	Metal Pail	719692-024101	1	57 lbs	48	2,786 lbs	1 year
	TIMBERLINE™	4 gal	Metal Pail	719692-023913	1	57 lbs	48	2,786 lbs	1 year
	2049	16 oz	Squeeze Bottle	719692-022183	12	28 lbs	96	2,738 lbs	2 year
	REPAIR™	1 qt	Plastic Bottle	719692-024118	6	14 lbs	60	890 lbs	1 year
	REPAIR™ KIT	Box	Cardboard Box	719692-024125	8	14 lbs	48	722 lbs	1 year
CARPET	AGILE*	4 gal	Plastic Pail	719692-023074	1	43 lbs	48	2,114 lbs	2 years
	VERSATILE*	1 gal	Plastic Pail	719692-022763	4	37 lbs	45	1,715 lbs	2 years
		4 gal	Plastic Pail	719692-022701	1	37 lbs	48	1,826 lbs	
	900	4 gal	Plastic Pail	719692-001492	1	42 lbs	48	2,066 lbs	2 years
	722	1 gal	Plastic F-Style	719692-001362	4	45 lbs	48	2,210 lbs	2 years
	710	1 qt	Squeeze Bottle	719692-001331	12	26 lbs	48	1,298 lbs	1 year
		1 gal	Plastic F-Style	719692-001348	4	34 lbs	48	1,682 lbs	
	EDGE-LOCK	8 oz	Squeeze Bottle	719692-023982	12	8 lbs	60	530 lbs	1 year
	2070	4 gal	Plastic Pail	719692-001737	1	42 lbs	48	2,066 lbs	2 years
	2055	4 gal	Plastic Pail	719692-001676	1	44 lbs	48	2,162 lbs	2 years
	2089	4 gal	Plastic Pail	719692-016304	1	44 lbs	48	2,162 lbs	2 years
	720	1 gal	Metal F-Style	719692-001355	4	33 lbs	60	2,030 lbs	1 year
	720-C	1 gal	Metal F-Style	719692-016427	4	33 lbs	60	2,030 lbs	1 year
	757	4 gal	Metal Pail	719692-001430	1	40 lbs	48	1,970 lbs	1 year
	775	1 qt	Metal Container	719692-001461	12	25 lbs	60	1,550 lbs	1 year
	775-C	1 qt	Metal Container	719692-015598	12	25 lbs	60	1,550 lbs	1 year

STORAGE REQUIREMENTS

All TAYLOR products should be stored in their original container, unopened, at temperatures between 50–90°F (10–32° C). While most products are freeze-thaw stable (10°F [-12°C]), it is recommended to protect them from freezing. Some products are not freeze-thaw stable and must be protected from freezing. See each product’s technical data sheet (TDS) for complete details.

\*Product weights may vary.



Scan for up-to-date product information.



Download on the App Store



GET IT ON Google Play

	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/UNIT	UNIT WEIGHT*	UNITS/PALLET	WEIGHT/PALLET	SHELF LIFE
SPECIALTY	FINALE*	2 gal	Plastic Cartridge	719692-023258	1	27 lbs	60	1,670 lbs	1 year
		10 oz	Plastic Cartridge	719692-023067	12	12 lbs	60	770 lbs	2 years
		30 oz	Plastic Cartridge	719692-023050	12	35 lbs	50	1,800 lbs	
		1 gal	Plastic Pail	719692-023043	4	48 lbs	45	2,210 lbs	
		4 gal	Plastic Pail	719692-023036	1	48 lbs	48	2,354 lbs	
	ELEVATE*	1 gal	Plastic Pail	719692-023968	4	37 lbs	45	1,715 lbs	2 years
	GRAVITY*	4 gal	Plastic Pail	719692-023982	1	36 lbs	48	1,778 lbs	2 years
	TERRAIN™	4 gal	Metal Pail	719692-024354	1	57 lbs	48	2,786 lbs	1 year
	2025	1 gal	Plastic F-Style	719692-021025	4	37 lbs	48	1,826 lbs	2 years
		4 gal	Plastic Pail	719692-015772	1	37 lbs	48	1,826 lbs	
	901	1 gal	Plastic Pail	719692-014027	4	54 lbs	45	2,480 lbs	2 years
		3.5 gal	Plastic Pail	719692-010357	1	48 lbs	48	2,354 lbs	
	1N	1 qt	Metal Container	719692-002086	12	23 lbs	48	1,154 lbs	1 year
		1 gal	Metal Container	719692-002093	4	29 lbs	45	1,355 lbs	
		4 gal	Metal Pail	719692-002109	1	32 lbs	48	1,586 lbs	
	1N-C	1 pt	Metal Container	719692-015543	12	13 lbs	60	830 lbs	1 year
		1 gal	Metal Container	719692-015567	4	29 lbs	45	1,355 lbs	
	725	12 oz	Aerosol Spray	719692-016779	12	16 lbs	48	818 lbs	1 year
MOISTURE	SAHARA*	2 gal	Plastic Pail	719692-022749	1	17 lbs	60	1,070 lbs	1 year
	ZEPHYR*	4 gal	Plastic Pail	719692-022732	1	37 lbs	48	1,826 lbs	2 years

PRODUCTION CODE KEY 1

SAMPLE BATCH CODE: **D2C2325** = Dalton, 2022, March, Designation #

D

2C2325 = The first character designates where the product was manufactured  
Example: D = Dalton F = Fontana T = Texas

D

2

C2325 = The second character designates the year of manufacture  
Example: 9 = 2019 0 = 2020 1 = 2021 2 = 2022

D2

C

2325 = The third character designates the month of manufacture  
Example: A = Jan B = Feb C = March D = April

D2C

2325

 = The last four numbers are generated sequentially

PRODUCTION CODE KEY 2

SAMPLE BATCH CODE: **12G23** = The 12<sup>th</sup> batch of July 2023

12

G23 = The first two character designate the batch number for the month

12

G

23 = The third character designates the month of manufacture  
Example: A = Jan B = Feb C = March D = April

12G

23

 = The last two characters designate the year of manufacture





# TAYLOR<sup>TM</sup>

## ADHESIVES

A Meridian Brand



☎ 800.868.4583  
💻 [tayloradhesives.com](https://tayloradhesives.com)  
📍 800 College Drive, Dalton, GA 30720



© 2025 Taylor Adhesives. All rights reserved.